

The five-day job: A BlackByte ransomware intrusion case study

 microsoft.com/en-us/security/blog/2023/07/06/the-five-day-job-a-blackbyte-ransomware-intrusion-case-study/

July 6, 2023



By

As ransomware attacks continue to grow in number and sophistication, threat actors can quickly impact business operations if organizations are not well prepared. In a recent investigation by Microsoft Incident Response (previously known as Microsoft Detection and Response Team – DART) of an intrusion, we found that the threat actor progressed through the full attack chain, from initial access to impact, in less than five days, causing significant business disruption for the victim organization.

Our investigation found that within those five days, the threat actor employed a range of tools and techniques, culminating in the deployment of BlackByte 2.0 ransomware, to achieve their objectives. These techniques included:

- Exploitation of unpatched internet-exposed Microsoft Exchange Servers
- Web shell deployment facilitating remote access
- Use of living-off-the-land tools for persistence and reconnaissance
- Deployment of Cobalt Strike beacons for command and control (C2)
- Process hollowing and the use of vulnerable drivers for defense evasion
- Deployment of custom-developed backdoors to facilitate persistence
- Deployment of a custom-developed data collection and exfiltration tool

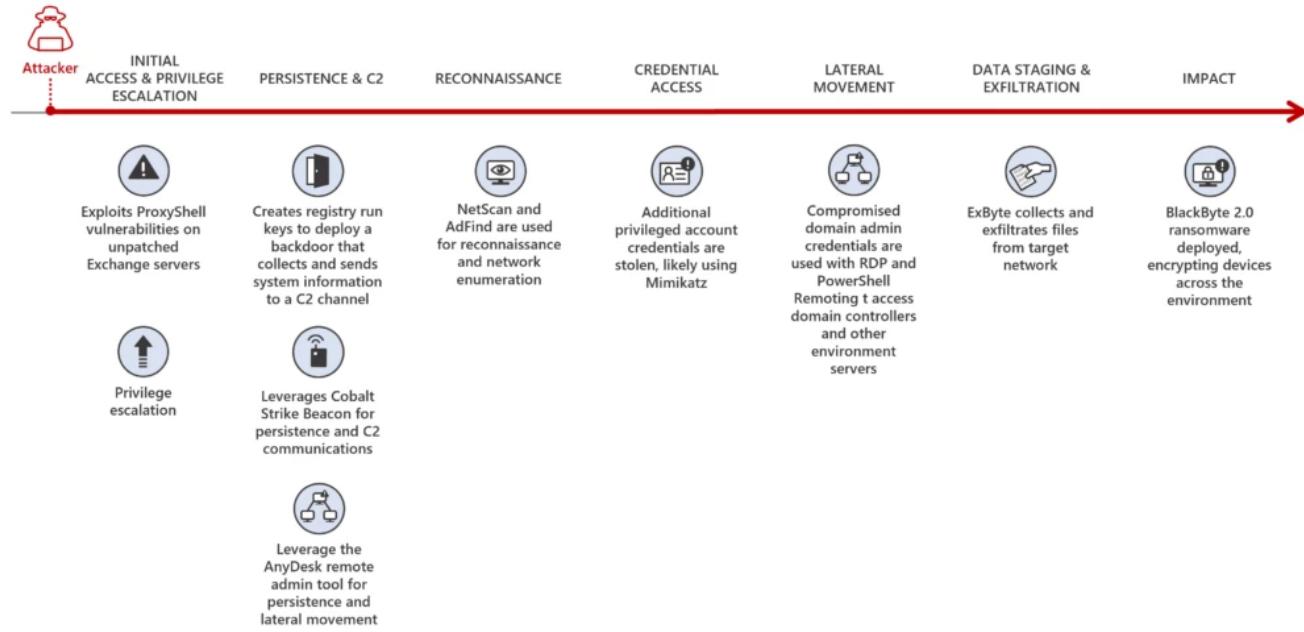


Figure 1. BlackByte 2.0 ransomware attack chain

In this blog, we share details of our investigation into the end-to-end attack chain, exposing security weaknesses that the threat actor exploited to advance their attack. As we learned from Microsoft's tracking of ransomware attacks and the [cybercriminal economy](#) that enables them, disrupting common attack patterns could stop many of the attacker activities that precede ransomware deployment. This case highlights that common security hygiene practices go a long way in preventing, identifying, and responding to malicious activity as early as possible to mitigate the impact of ransomware attacks. We encourage organizations to follow the outlined mitigation steps, including ensuring that internet-facing assets are up to date and configured securely. We also share indicators of compromise, detection details, and hunting guidance to help organizations identify and respond to these attacks in their environments.

Forensic analysis

Initial access and privilege escalation

To obtain initial access into the victim's environment, the threat actor was observed exploiting the [ProxyShell vulnerabilities](#) CVE-2021-34473, CVE-2021-34523, and CVE-2021-31207 on unpatched Microsoft Exchange Servers. The exploitation of these vulnerabilities allowed the threat actor to:

- Attain system-level privileges on the compromised Exchange host
- Enumerate LegacyDN of users by sending Autodiscover requests, including SIDs of users
- Construct a valid authentication token and use it against the Exchange PowerShell backend
- Impersonate domain admin users and create a web shell by using the *New-MailboxExportRequest* cmdlet
- Create web shells to obtain remote control on affected servers

The threat actor was observed operating from the following IP to exploit ProxyShell and access the web shell:

185.225.73[.]244

Persistence

Backdoor

After gaining access to a device, the threat actor created the following registry run keys to run a payload each time a user signs in:

Registry key	Value name	Value data
HKEY_CURRENT_USER\Software\Microsoft\Windows\CurrentVersion\Run	MsEdgeMsE	rundll32 C:\Users\user\Downloads\api-msvc.dll,Default
HKEY_CURRENT_USER\Software\Microsoft\Windows\CurrentVersion\Run	MsEdgeMsE	rundll32 C:\temp\api-msvc.dll,Default
HKEY_CURRENT_USER\Software\Microsoft\Windows\CurrentVersion\Run	MsEdgeMsE	rundll32 C:\systemtest\api-system.png,Default

The file *api-msvc.dll* (SHA-256: 4a066569113a569a6feb8f44257ac8764ee8f2011765009fdfd82fe3f4b92d3e) was determined to be a backdoor capable of collecting system information, such as the installed antivirus products, device name, and IP address. This information is then sent via HTTP POST request to the following C2 channel:

hxps://myvisit[.]alteksecurity[.]org/t

The organization was not using Microsoft Defender Antivirus, which detects this malware as Trojan:Win32/Kovter!MSR, as the primary antivirus solution, and the backdoor was allowed to run.

An additional file, *api-system.png*, was identified to have similarities to *api-msvc.dll*. This file behaved like a DLL, had the same default export function, and also leveraged run keys for persistence.

Cobalt Strike Beacon

The threat actor leveraged Cobalt Strike to achieve persistence. The file *sys.exe* (SHA-256: 5f37b85687780c089607670040dbb3da2749b91b8adc0aa411fd6280b5fa7103), detected by Microsoft Defender Antivirus as Trojan:Win64/CobaltStrike!MSR, was determined to be a Cobalt Strike Beacon and was downloaded directly from the file sharing service *temp[.]sh*:

hxps://temp[.]sh/szAyn/sys.exe

This beacon was configured to communicate with the following C2 channel:

109.206.243[.]59:443

AnyDesk

Threat actors leverage legitimate remote access tools during intrusions to blend into a victim network. In this case, the threat actor utilized the remote administration tool AnyDesk, to maintain persistence and move laterally within the network. AnyDesk was installed as a service and was run from the following paths:

- C:\systemtest\anydesk\AnyDesk.exe
- C:\Program Files (x86)\AnyDesk\AnyDesk.exe
- C:\Scripts\AnyDesk.exe

Successful connections were observed in the AnyDesk log file *ad_svc.trace* involving anonymizer service IP addresses linked to TOR and MULLVAD VPN, a common technique that threat actors employ to obscure their source IP ranges.

Reconnaissance

We found the presence and execution of the network discovery tool NetScan being used by the threat actor to perform network enumeration using the following file names:

- *netscan.exe* (SHA-256: 1b9badb1c646a19cdf101ac4f6fd23bc61eaab8c9f925eb41848cea9fd0738e)
- *netapp.exe* (SHA-256: 1b9badb1c646a19cdf101ac4f6fd23bc61eaab8c9f925eb41848cea9fd0738e)

Additionally, execution of AdFind (SHA-256: f157090fd3cc4220298c06ce8734361b724d80459592b10ac632acc624f455e), an Active Directory reconnaissance tool, was observed in the environment.

Credential access

Evidence of likely usage of the credential theft tool Mimikatz was also uncovered through the presence of a related log file *mimikatz.log*. Microsoft IR assesses that Mimikatz was likely used to attain credentials for privileged accounts.

Lateral movement

Using compromised domain admin credentials, the threat actor used Remote Desktop Protocol (RDP) and PowerShell remoting to obtain access to other servers in the environment, including domain controllers.

Data staging and exfiltration

In one server where Microsoft Defender Antivirus was installed, a suspicious file named *explorer.exe* was identified, detected as Trojan:Win64/WinGoObfusc.LK!MT, and quarantined. However, because tamper protection wasn't enabled on this server, the threat actor was able to disable the Microsoft Defender Antivirus service, enabling the threat actor to run the file using the following command:

explorer.exe P@\$\$w0rd

After reverse engineering *explorer.exe*, we determined it to be ExByte, a GoLang-based tool developed and commonly used in BlackByte ransomware attacks for collection and exfiltration of files from victim networks. This tool is capable of enumerating files of interest across the network and, upon execution, creates a log file containing a list of files and associated metadata. Multiple log files were uncovered during the investigation in the path:

```
C:\Exchange\MSExchLog.log
```

Analysis of the binary revealed a list of file extensions that are targeted for enumeration.

```
-64 6f 63 78 2c 78 6c 73  pdf,doc,docx,xls  
-74 2c 63 73 76 2c 70 73 ,xlsx,txt,csv,ps  
-00 00 00 00 00 00 00 00 t.....  
  
explorer.exe
```

Figure 2. Binary analysis showing file extensions enumerated by *explorer.exe*

Forensic analysis identified a file named *data.txt* that was created and later deleted after ExByte execution. This file contained obfuscated credentials that ExByte leveraged to authenticate to the popular file sharing platform Mega NZ using the platform's API at:

```
hxxps://g.api mega.co[.]nz
```

```
char * __fastcall decodeMegaDomain(__int64 a1)  
{  
    __int64 v1; // r14  
    void *v2; // rax  
    __int64 v4; // [rsp-40h] [rbp-A8h]  
    __int64 v5[4]; // [rsp+40h] [rbp-28h] BYREF  
  
    if ( v5 <= *(v1 + 16) )  
        runtime_morestack_noctxt(a1);  
    v5[0] = 0x6BCB26650E75CCBi64;  
    v5[1] = 0x482DFFCB3A84B973i64;  
    v5[2] = 0x238600C953313797i64;  
    v5[3] = 0xFE95A7C665DF2E3i64;  
    runtime_growslice(v4);  
    qmemcpy(v2, "https://g.api.mega.co.nz", 24);  
    return runtime_slicebytetostring(24i64);  
}
```

Figure 3. Binary analysis showing *explorer.exe* functionality for connecting to file sharing service MEGA NZ

We also determined that this version of Exbyte was crafted specifically for the victim, as it contained a hardcoded device name belonging to the victim and an internal IP address.

ExByte execution flow

Upon execution, ExByte decodes several strings and checks if the process is running with privileged access by reading `\.\!PHYSICALDRIVE0`:

If this check fails, `ShellExecuteW` is invoked with the `/pOperation` parameter `RunAs`, which runs *explorer.exe* with elevated privileges.

After this access check, *explorer.exe* attempts to read the *data.txt* file in the current location:

If the text file doesn't exist, it invokes a command for self-deletion and exits from memory:

```
C:\Windows\system32\cmd.exe /c ping 1.1.1.1 -n 10 > nul & Del <PATH>\explorer.exe /F /Q
```

If *data.txt* exists, *explorer.exe* reads the file, passes the buffer to Base64 decode function, and then decrypts the data using the key provided in the command line. The decrypted data is then parsed as JSON below and fed for login function:

```
{  
    "a": "us0",  
    "user": "<CONTENT FROM data.txt>"  
}
```

Finally, it forms a URL for sign-in to the API of the service MEGA NZ:

```
hxxps://g.api.mega.co[.]nz/cs?id=1674017543
```

Data encryption and destruction

On devices where files were successfully encrypted, we identified suspicious executables, detected by Microsoft Defender Antivirus as Trojan:Win64/BlackByte!MSR, with the following names:

- *wEFT.exe*
- *schillerized.exe*

The files were analyzed and determined to be BlackByte 2.0 binaries responsible for encryption across the environment. The binaries require an 8-digit key number to encrypt files.

Two modes of execution were identified:

- When the `-s` parameter is provided, the ransomware self-deletes and encrypts the machine it was executed on.
- When the `-a` parameter is provided, the ransomware conducts enumeration and uses an Ultimate Packer Executable (UPX) packed version of PsExec to deploy across the network. Several domain admin credentials were hardcoded in the binary, facilitating the deployment of the binary across the network.

Depending on the switch (`-s` or `-a`), execution may create the following files:

- `C:\SystemData\{M8y\}89s7.exe` (UPX-packed PsExec with a random name; SHA-256: ba3ec3f445683d0d0407157fda0c26fd669c0b8cc03f21770285a20b3133098f)
- `C:\SystemData\wEFT.exe` (Additional BlackByte binary)
- `C:\SystemData\{MsExchangeLog1.log}` (Log file)
- `C:\SystemData\rENEGOtiAtES` (A vulnerable (CVE-2019-16098) driver `RtCore64.sys` used to evade detection by installed antivirus software; SHA-256: 01aa278b07b58dc46c84bd0b1b5c8e9ee4e62ea0bf7a695862444af32e87f1fd)
- `C:\SystemData\{Hu6c4.ico}` (Random name – BlackBytes icon)
- `C:\SystemData\BB_Readme_file.txt` (BlackByte ReadMe file)
- `C:\SystemData\skip_bypass.txt` (Unknown)

BlackByte 2.0 ransomware capabilities

Some capabilities identified for the BlackByte 2.0 ransomware were:

- Antivirus bypass
 - The file `rENEGOtiAtES` creates matches `RTCore64.sys`, a vulnerable driver (CVE-2049-16098) that allows any authenticated user to read or write to arbitrary memory
 - The BlackByte binary then creates and starts a service named `RABAsSaa` calling `rENEGOtiAtES`, and exploits this service to evade detection by installed antivirus software
- Process hollowing
 - Invokes `svchost.exe`, injects to it to complete device encryption, and self-deletes by executing the following command:
`cmd.exe /c ping 1.1.1.1 -n 10 > Nul & Del "PATH_TO_BLACKBYTE" /F /Q`
- Modification / disabling of Windows Firewall
 - The following commands are executed to either modify existing Windows Firewall rules, or to disable Windows Firewall entirely:
`cmd /c netsh advfirewall set allprofiles state off`
○
`cmd /c netsh advfirewall firewall set rule group="File and Printer Sharing" new enable=Yes`
`cmd /c netsh advfirewall firewall set rule group="Network Discovery" new enable=Yes`
- Modification of volume shadow copies
 - The following commands are executed to destroy volume shadow copies on the machine:
`cmd /c vssadmin Resize ShadowStorage /For=B:\ /On=B:\ /MaxSize=401MB`
`cmd /c vssadmin Resize ShadowStorage /For=B:\ /On=B:\ /MaxSize=UNBOUNDED`
- Modification of registry keys/values
 - The following commands are executed to modify the registry, facilitating elevated execution on the device:
`cmd /c reg add HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System /v LocalAccountTokenFilterPolicy /t REG_DWORD /d 1 /f`
○
`cmd /c reg add HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System /v EnableLinkedConnections /t REG_DWORD /d 1 /f`
`cmd /c reg add HKLM\SYSTEM\CurrentControlSet\Control\FileSystem /v LongPathsEnabled /t REG_DWORD /d 1 /f`
- Additional functionality
 - Ability to terminate running services and processes
 - Ability to enumerate and mount volumes and network shares for encryption
 - Perform anti-forensics technique timestamping (sets the file time of encrypted and ReadMe file to 2000-01-01 00:00:00)
 - Ability to perform anti-debugging techniques

Recommendations

To guard against BlackByte ransomware attacks, Microsoft recommends the following:

- Ensure that you have a patch management process in place and that patching for internet-exposed devices is prioritized; Understand and assess your cyber exposure with advanced vulnerability and configuration assessment tools like [Microsoft Defender Vulnerability Management](#)
- Implement an endpoint detection and response (EDR) solution like [Microsoft Defender for Endpoint](#) to gain visibility into malicious activity in real time across your network
- Ensure antivirus protections are updated regularly by [turning on cloud-based protection](#) and that your antivirus solution is configured to block threats
- Enable [tamper protection](#) to prevent components of Microsoft Defender Antivirus from being disabled
- Block inbound traffic from IPs specified in the indicators of compromise section of this report
- Block inbound traffic from TOR exit nodes
- Block inbound access from unauthorized public VPN services
- Restrict administrative privileges to prevent authorized system changes

Conclusion

BlackByte ransomware attacks target organizations that have infrastructure with unpatched vulnerabilities. As outlined in the [Microsoft Digital Defense Report](#), common security hygiene practices, including keeping systems up to date, could protect against 98% of attacks.

As new tools are being developed by threat actors, a modern threat protection solution like Microsoft 365 Defender is necessary to prevent and detect the multiple techniques used in the attack chain, especially where the threat actor attempts to evade or disable specific defense mechanisms. Hunting for malicious behavior should be performed regularly in order to detect potential attacks that could evade detections, as a complementary activity for continuous monitoring from security tools alerts and incidents.

To understand how Microsoft can help you secure your network and respond to network compromise, visit <https://aka.ms/MicrosoftIR>.

Microsoft 365 Defender detections

Microsoft Defender Antivirus

Microsoft Defender Antivirus detects this threat as the following malware:

- Trojan:Win32/Kovter!MSR
- Trojan:Win64/WinGoObfusc.LK!MT
- Trojan:Win64/BlackByte!MSR
- HackTool:Win32/AdFind!MSR
- Trojan:Win64/CobaltStrike!MSR

Microsoft Defender for Endpoint

The following alerts might indicate threat activity related to this threat. Note, however, that these alerts can be also triggered by unrelated threat activity.

- 'CVE-2021-31207' exploit malware was detected
- An active 'NetShDisableFireWall' malware in a command line was prevented from executing.
- Suspicious registry modification.
- 'Rtcore64' hacktool was detected
- Possible ongoing hands-on-keyboard activity (Cobalt Strike)
- A file or network connection related to a ransomware-linked emerging threat activity group detected
- Suspicious sequence of exploration activities
- A process was injected with potentially malicious code
- Suspicious behavior by cmd.exe was observed
- 'Blackbyte' ransomware was detected

Microsoft Defender Vulnerability Management

Microsoft Defender Vulnerability Management surfaces devices that may be affected by the following vulnerabilities used in this threat:

- CVE-2021-34473
- CVE-2021-34523
- CVE-2021-31207
- CVE-2019-16098

Hunting queries

Microsoft 365 Defender

Microsoft 365 Defender customers can run the following query to find related activity in their networks:

ProxyShell web shell creation events

```
DeviceProcessEvents  
| where ProcessCommandLine has_any ("ExcludeDumpster", "New-ExchangeCertificate") and ProcessCommandLine has_any ("-RequestFile", "-FilePath")
```

Suspicious vssadmin events

```
DeviceProcessEvents  
| where ProcessCommandLine has_any ("vssadmin", "vssadmin.exe") and ProcessCommandLine has "Resize ShadowStorage" and  
ProcessCommandLine has_any ("MaxSize=401MB", " MaxSize=UNBOUNDED")
```

Detection for persistence creation using Registry Run keys

```
DeviceRegistryEvents  
| where ActionType == "RegistryValueSet"  
| where (RegistryKey has @"Microsoft\Windows\CurrentVersion\RunOnce" and RegistryValueName == "MsEdgeMsE")  
or (RegistryKey has @"Microsoft\Windows\CurrentVersion\RunOnceEx" and RegistryValueName == "MsEdgeMsE")  
or (RegistryKey has @"Microsoft\Windows\CurrentVersion\Run" and RegistryValueName == "MsEdgeMsE")  
| where RegistryValueData startswith @"rundll32"  
| where RegistryValueData endswith @".dll,Default"  
| project Timestamp,DeviceId,DeviceName,ActionType,RegistryKey,RegistryValueName,RegistryValueData
```

Microsoft Sentinel

Microsoft Sentinel customers can use the TI Mapping analytics (a series of analytics all prefixed with 'TI map') to automatically match the malicious domain indicators mentioned in this blog post with data in their workspace. If the TI Map analytics are not currently deployed, customers can install the Threat Intelligence solution from the Microsoft Sentinel Content Hub to have the analytics rule deployed in their Sentinel workspace. More details on the Content Hub can be found here: <https://learn.microsoft.com/azure/sentinel/sentinel-solutions-deploy>.

Microsoft Sentinel also has a range of detection and threat hunting content that customers can use to detect the post exploitation activity detailed in this blog in addition to Microsoft 365 Defender detections list above.

Indicators of compromise

The table below shows IOCs observed during our investigation. We encourage our customers to investigate these indicators in their environments and implement detections and protections to identify past related activity and prevent future attacks against their systems.

Indicator	Type	Description
4a066569113a569a6feb8f44257ac8764ee8f2011765009fdfd82fe3f4b92d3e	SHA-256	api-msvc.dll (Backdoor installed through RunKeys)
5f37b85687780c089607670040dbb3da2749b91b8adc0aa411fd6280b5fa7103	SHA-256	sys.exe (Cobalt Strike Beacon)
01aa278b07b58dc46c84bd0b1b5c8e9ee4e62ea0bf7a695862444af32e87f1fd	SHA-256	rENEgOtiAtES (Vulnerable driver RtCore64.sys created by BlackByte binary)
ba3ec3f445683d0d0407157fda0c26fd669c0b8cc03f21770285a20b3133098f	SHA-256	[RANDOM_NAME].exe (UPX Packed PsExec created by BlackByte binary)
1b9badb1c646a19cdf101ac4f6fdd23bc61eaab8c9f925eb41848cea9fd0738e	SHA-256	"netscan.exe", "netapp.exe (Netscan network discovery tool)
f157090fd3ccd4220298c06ce8734361b724d80459592b10ac632acc624f455e	SHA-256	AdFind.exe (Active Directory information gathering tool)
hxps://myvisit[.]alteksecurity[.]org/t	URL	C2 for backdoor api-msvc.dll
hxps://temp[.]sh/szAyn/sys.exe	URL	Download URL for sys.exe
109.206.243[.]59	IP Address	C2 for Cobalt Strike Beacon sys.exe
185.225.73[.]244	IP Address	Originating IP address for ProxyShell exploitation and web shell interaction

NOTE: These indicators should not be considered exhaustive for this observed activity.

Appendix

File extensions targeted by BlackByte binary for encryption:

.4dd	.4dl	.accdb	.accdc	.accde	.accdr	.accdt	.accft
.adb	.ade	.adf	.adp	.arc	.ora	.alf	.ask
.btr	.bdf	.cat	.cdb	.ckp	.cma	.cpd	.dacpac
.dad	.dadiagrams	.daschema	.db	.db-shm	.db-wal	.db3	.dbc
.dbf	.dbs	.dbt	.dbv	.dbx	.dcb	.dct	.dcx
.ddl	.dls	.dp1	.dqy	.dsk	.dsn	.dtsx	.dxl
.eco	.ecx	.edb	.epim	.exb	.fcd	.fdb	.fic
.fmp	.fmp12	.fmpl	.fol	.fp3	.fp4	.fp5	.fp7
.fpt	.frm	.gdb	.grdb	.gwi	.hdb	.his	.ib
.idb	.ihx	.itdb	.itw	.jet	.jtx	.kdb	.kexi
.kxic	.kexis	.lgc	.lwx	.maf	.maq	.mar	.masmov
.mdb	.mpd	.mrg	.mud	.mwb	.myd	.ndf	.nnt
.nrmlib	.ns2	.ns3	.ns4	.nsf	.nv	.nv2	.nwdb
.nyf	.odb	.ogy	.orx	.owc	.p96	.p97	.pan
.pdb	.pdm	.pnz	.qry	.qvd	.rbf	.rctd	.rod
.rodx	.rpd	.rsd	.sas7bdat	.sbf	.scx	.sdb	.sdc
.sdf	.sis	.spg	.sql	.sqlite	.sqlite3	.sqlitedb	.te
.temx	.tmd	.tps	.trc	.trm	.fdb	.udl	.usr
.v12	.vis	.vpd	.vvv	.wdb	.wmdb	.wrk	.xdb
.xld	.xmlff	.abccdb	.abs	.abx	.accdw	.and	.db2
.fm5	.hjt	.icg	.icr	.kdb	.lut	.maw	.mdn
	.mdt						

Shared folders targeted for encryption (Example: \\[IP address]\\Downloads):

Users	Backup	Veeam	homes	home
media	common	Storage Server	Public	Web
Images	Downloads	BackupData	ActiveBackupForBusiness	Backups
NAS-DC	DCBACKUP	DirectorFiles	share	

File extensions ignored:

.ini	.url	.msilog	.log	.ldf	.lock	.theme	.msi
.sys	.wpk	.cpl	.adv	.msc	.scr	.key	.ico
.dll	.hta	.deskthemepack	.nomedia	.msu	.rtp	.msp	.idx
.ani	.386	.diagcfg	.bin	.mod	.ics	.com	.hlp
.spl	.nls	.cab	.exe	.diagpkg	.icl	.ocx	.rom
.prf	.thempack	.msstyles	.icns	.mpa	.drv	.cur	.diagcab
.cmd	.shs						

Folders ignored:

windows	boot	program files (x86)	windows.old	programdata
intel	bitdefender	trend micro	windowsapps	appdata

application data system volume information perflogs msocache

Files ignored:

bootnxt	ntldr	bootmgr	thumbs.db
ntuser.dat	bootsect.bak	autoexec.bat	iconcache.db
bootfont.bin			

Processes terminated:

teracopy	teamviewer	nsservice	nsctrl	uranium
processhacker	procmon	pestudio	procmon64	x32dbg
x64dbg	cff explorer	procexp	pslist	tcpview
tcpvcon	dbgview	rammap	rammap64	vmmmap
ollydbg	autoruns	autorunssc	filemon	regmon
idaq	idaq64	immunitydebugger	wireshark	dumpcap
hookexplorer	importrec	petools	lordpe	sysinspector
proc_analyzer	sysanalyzer	sniff_hit	windbg	joeboxcontrol
joeboxserver	resourcehacker	fiddler	httpdebugger	dumpit
rammap	rammap64	vmmmap	agntsvc	cntaosmgr
dbeng50	dbsnmp	encsvc	infopath	isqlplussvc
mbamtray	msaccess	msftesql	mspub	mydesktopqos
mydesktopservice	mysqld	mysqld-nt	mysqld-opt	Ntrtscan
ocautoupds	ocomm	ocssd	onenote	oracle
outlook	PccNTMon	powerpnt	sqbcoreservice	sql
sqlagent	sqlbrowser	sqlservr	sqlwriter	steam
synctime	tbirdconfig	thebat	thebat64	thunderbird
tmlisten	visio	winword	wordpad	xfssvcccon

zoolz

Services terminated:

CybereasonRansomFree	vnetd	bpcd	SamSs	TeraCopyService
msftesql	nsService	kvvssbridge64	vapiendpoint	ShMonitor
Smcinst	SmcService	SntpService	svcGenericHost	Swi_
TmCCSF	tmlisten	TrueKey	TrueKeyScheduler	TrueKeyServiceHelper
WRSVC	McTaskManager	OracleClientCache80	mfefire	wbengine
mfemms	RESvc	mfevtcp	sacsvr	SAVAdminService
SepMasterService	PDVFSService	ESHASRV	SDRSVC	FA_Scheduler
KAVFS	KAVFS_KAVFSGT	kavfsslip	klnagent	macmnsvc
masvc	MBAMService	MBEndpointAgent	McShield	audioendpointbuilder
Antivirus	AVP	DCAgent	bedbg	EhttpSrv
MMS	ekrn	EPSecurityService	EPUpdateService	ntrtscan
EsgShKernel	msexchangeadtopology	AcrSch2Svc	MSOLAP\$TPSAMA	Intel(R) PROSet Monitoring

msexchangeimap4	ARSM	unistoresvc_1af40a	ReportServer\$TPS	MSOLAP\$SYSTEM_BGC
W3Svc	MSEExchangeSRS	ReportServer\$TPSAMMA	Zoolz 2 Service	MSOLAP\$TPS
aphidmonitorservice	SstpSvc	MSEExchangeMTA	ReportServer\$SYSTEM_BGC	Symantec System Recovery
UI0Detect	MSEExchangeSA	MSEExchangeIS	ReportServer	MsDtsServer110
POP3Svc	MSEExchangeMGMT	SMTPSvc	MsDtsServer	lisAdmin
MSEExchangeES	EraserSvc11710	Enterprise Client Service	MsDtsServer100	NetMsmqActivator
stc_raw_agent	VSNAPVSS	PDVFSService	AcrSch2Svc	Acronis
CASAD2DWebSvc	CAARCUpdateSvc	McAfee	avpsus	DLPAgentService
mfewc	BMR Boot Service	DefWatch	ccEvtMgr	ccSetMgr
SavRoam	RTVsc screenconnect	ransom	sqltelemetry	msexch
vnc	teamviewer	msolap	veeam	backup
sql	memtas	vss	sophos	svc\$
mepocs	wuauserv			

Drivers that Blackbyte can bypass:

360avflt.sys	360box.sys	360fsflt.sys	360qpesv.sys	5nine.cbt.sys
a2acc.sys	a2acc64.sys	a2ertpx64.sys	a2ertpx86.sys	a2gffi64.sys
a2gffx64.sys	a2gffx86.sys	aaf.sys	aalprotect.sys	abrpmon.sys
accessvalidator.sys	acdriver.sys	acdrv.sys	adaptivaclientcache32.sys	adaptivaclientcact
adcvcnts.sys	adspiderdoc.sys	aefilter.sys	agentrtm64.sys	agfsmmon.sys
agseclock.sys	agsyslock.sys	ahkamflit.sys	ahksvpro.sys	ahkusbfw.sys
ahnrglhlh.sys	aictracedrv_am.sys	airship-filter.sys	ajfsprot.sys	alcapture.sys
alfaff.sys	altcbt.sys	amfd.sys	amfsm.sys	amm6460.sys
amm8660.sys	amsfilter.sys	amznmon.sys	antileakfilter.sys	antispyfilter.sys
anvfsm.sys	apexsqlfilterdriver.sys	appcheckd.sys	appguard.sys	appvmon.sys
arfmonnt.sys	arta.sys	arwflt.sys	asgard.sys	ashavscan.sys
asiofms.sys	aswfsblk.sys	aswmonflit.sys	aswsnx.sys	awswsp.sys
aszflnt.sys	atamptnt.sys	atc.sys	atdragent.sys	atdragent64.sys
aternityregistryhook.sys	atflt.sys	atrsdfw.sys	auditflt.sys	aupdri.sys
avapsfd.sys	avc3.sys	avckf.sys	avfsmn.sys	avgmfi64.sys
avgmfrs.sys	avgmfx64.sys	avgmfx86.sys	avgntflt.sys	avgtpx64.sys
avgtpx86.sys	avipbb.sys	avkmgr.sys	avmf.sys	awarecore.sys
axfltdrv.sys	axfsysmon.sys	ayfilter.sys	b9kernel.sys	backupreader.sys
bamfltr.sys	bapfecpt.sys	bbfilter.sys	bd0003.sys	bddevflit.sys
bdfiledefend.sys	bdflespy.sys	bdfm.sys	bdfsfltr.sys	bdprivmon.sys
bdrdfolder.sys	bdsdkit.sys	bdsfilter.sys	bdsflt.sys	bdsvm.sys
bdsysmon.sys	bedaisy.sys	bemk.sys	bfaccess.sys	bfiltre.sys
bfmon.sys	bhdrv64.sys	bhdrv86.sys	bhkavka.sys	bhkavki.sys
bkavautoflt.sys	bkavsdflt.sys	blackbirdfsa.sys	blackcat.sys	bmfsdrv.sys

bmregdrv.sys	boscmflt.sys	bosfsfltr.sys	bouncer.sys	boxifier.sys
brcow_x_x_x_x.sys	brfilter.sys	brnfilelock.sys	brnseclock.sys	browsermen.sys
bsrfsfltr.sys	bssaudit.sys	bsyaed.sys	bsyar.sys	bsydf.sys
bsyirmf.sys	bsyrtm.sys	bsysp.sys	bsywl.sys	bwfsdrv.sys
bzsenspdrv.sys	bzsenth.sys	bzsenyaradv.sys	caadflt.sys	caavfltr.sys
cancelsafe.sys	carbonblackk.sys	catflt.sys	catmf.sys	cbelam.sys
cbfilter20.sys	cbflts4.sys	cbfsfilter2017.sys	cbfsfilter2020.sys	cbsampledrv.sys
cdo.sys	cdrfsfltr.sys	cdsgfsfilter.sys	centrifyfsf.sys	cfrmd.sys
cfsfdrv	cgwmf.sys	change.sys	changelog.sys	chemometecfilter.:
ciscoampcefwdriver.sys	ciscoampheurdriver.sys	ciscosam.sys	clumiochangeblockmf.sys	cmdccav.sys
cmdcwagt.sys	cmdguard.sys	cmdmnefs.sys	cmflt.sys	code42filter.sys
codex.sys	conduantfsfltr.sys	containermonitor.sys	cpavfilter.sys	cpavkernel.sys
cpepmmon.sys	crexecprev.sys	crncache32.sys	crncache64.sys	crnsysm.sys
cruncopy.sys	csaam.sys	csaav.sys	csacentr.sys	csaenh.sys
csagent.sys	csareg.sys	csascr.sys	csbfilter.sys	csdevicecontrol.sys
csfirmwareanalysis.sys	csflt.sys	csmon.sys	cssdip.sys	ctamflt.sys
ctifile.sys	ctinet.sys	ctrpamon.sys	ctx.sys	cvcbt.sys
cvofflineflt32.sys	cvofflineflt64.sys	cvsflt.sys	cwdriver.sys	cwmem2k64.sys
cybkerneltracker.sys	cylancedrv64.sys	cyoptics.sys	cyprotectdrv32.sys	cyprotectdrv64.sys
cytmon.sys	cyverak.sys	cyvrfsfd.sys	cyvrlpc.sys	cyvrmtn.sys
datanow_driver.sys	dattofsf.sys	da_ctl.sys	dcafafilter.sys	dcfsgrd.sys
dcsnaprestore.sys	deepinsfs.sys	delete_flt.sys	devmonminifilter.sys	dfmfilter.sys
dgedriver.sys	dgfilter.sys	dgsafe.sys	dhwatchdog.sys	diflt.sys
diskactmon.sys	dkdrv.sys	dkrtwrtd.sys	dktlfsmf.sys	dnafsmonitor.sys
docvmonk.sys	docvmonk64.sys	dpmfilter.sys	drbdlock.sys	drivesentryfilterdr
drsfile.sys	drvhookcsmf.sys	drvhookcsmf_amd64.sys	drwebfwflt.sys	drwebfwft.sys
dsark.sys	dsdriver.sys	dsfemon.sys	dsflt.sys	dsflts.sys
dskmn.sys	dtdsel.sys	dtpl.sys	dwprot.sys	dwshield.sys
dwshield64.sys	eamonm.sys	easeflt.sys	easyanticheat.sys	eaw.sys
ecatdriver.sys	edevmon.sys	ednemfsfilter.sys	edrdrv.sys	edrsensor.sys
edsigk.sys	eectl.sys	eetd32.sys	eetd64.sys	eyehvh.sys
eyehvh64.sys	egambit.sys	egfilterk.sys	egminflt.sys	egnfsflt.sys
ehdrv.sys	elock2fsctldriver.sys	emxdrv2.sys	enigmafilemondriver.sys	enmon.sys
epdrv.sys	epfw.sys	epfwfwfp.sys	epicfilter.sys	epklib.sys
epp64.sys	epregflt.sys	eps.sys	epsmn.sys	equ8_helper.sys
eraser.sys	esensor.sys	esprobe.sys	estprmon.sys	estprp.sys
estregmon.sys	estregp.sys	estrkmon.sys	estrkr.sys	eventmon.sys
evmf.sys	evscase.sys	excfs.sys	exprevdriver.sys	failattach.sys
failmount.sys	fam.sys	fangcloud_autolock_driver.sys	fapmonitor.sys	farflt.sys
farwflt.sys	fasdriver	fcnotify.sys	fcontrol.sys	fdrtrace.sys

fekern.sys	fencry.sys	ffcfilt.sys	ffdriver.sys	fildds.sys
filefilter.sys	fileflt.sys	fileguard.sys	filehubagent.sys	filemon.sys
filemonitor.sys	filenamevalidator.sys	filescan.sys	filesharemon.sys	filesightmf.sys
filesystemcbt.sys	filetrace.sys	file_monitor.sys	file_protector.sys	file_tracker.sys
filrdriver.sys	fim.sys	fiometer.sys	fiopolicyfilter.sys	fjgsdis2.sys
fjseparettfilterredirect.sys	flashaccelfs.sys	flightrecorder.sys	fltrs329.sys	flyfs.sys
fmdrive.sys	fmkkc.sys	fmm.sys	fortiapfilter.sys	fortimon2.sys
fortimon.sys	fortishield.sys	fpav_rtp.sys	fpepfit.sys	fsafilter.sys
fsatp.sys	fsfilter.sys	fsgk.sys	fshs.sys	fsmon.sys
fsmonitor.sys	fsnk.sys	fsfilter.sys	fstrace.sys	fsulgk.sys
fsw31rj1.sys	gagsecurity.sys	gbpkm.sys	gcffilter.sys	gddcv.sys
gefcmp.sys	gemma.sys	geprotection.sys	ggc.sys	gibepcore.sys
gkff.sys	gkff64.sys	gkpfcb.sys	gkpfcb64.sys	gofsmf.sys
gpminifilter.sys	groundling32.sys	groundling64.sys	gtkdrv.sys	gumhfilter.sys
gzflt.sys	hafsnk.sys	hbflt.sys	hbfsfltr.sys	hcp_kernel_acq.s
hdcorrelatefdrv.sys	hdfilemon.sys	hdransomoffdrv.sys	hdrfs.sys	heimdall.sys
hexisfsmonitor.sys	hfeflt.sys	hiofs.sys	hmpalert.sys	hookcentre.sys
hooksys.sys	hpreg.sys	hsmltmon.sys	hsmltwl.sys	hssfwhl.sys
hvlminifilter.sys	ibr2fsk.sys	iccfileload.sys	iccfilteraudit.sys	iccfiltersc.sys
icfclientflt.sys	icrlmonitor.sys	iderafilterdriver.sys	ielcp.sys	ieslp.sys
ifs64.sys	ignis.sys	iguard.sys	iiscache.sys	ikfilesec.sys
im.sys	imffilter.sys	imfilter.sys	imgguard.sys	immflex.sys
immunetprotect.sys	immunetselfprotect.sys	inisbdrv64.sys	ino_flt.sys	intelcas.sys
intmfs.sys	inuse.sys	invprotectdrv.sys	invprotectdrv64.sys	ionmonwdrv.sys
iothorfs.sys	ipcomfltr.sys	ipfilter.sys	iprotect.sys	iridiumswitch.sys
irongatedfd.sys	isafekrnl.sys	isafekrnlmon.sys	isafermon	isecureflt.sys
isedrv.sys	isfpdrv.sys	isirmfmon.sys	isregflt.sys	isregflt64.sys
issfltr.sys	issregistry.sys	it2drv.sys	it2reg.sys	ivappmon.sys
iwdmfs.sys	iwhlp.sys	iwhlp2.sys	iwhlpxp.sys	jdppsf.sys
jdppwf.sys	jkppob.sys	jkppok.sys	jkpppf.sys	jkppxk.sys
k7sentry.sys	kavnsi.sys	kawachfsminifilter.sys	kc3.sys	kconv.sys
kernelagent32.sys	kewf.sys	kfac.sys	kfileflt.sys	kisknl.sys
klam.sys	klbg.sys	klboot.sys	kldback.sys	kldlinf.sys
kldtool.sys	klfdefsf.sys	klflt.sys	klgse.sys	klhk.sys
klif.sys	klifaa.sys	klifks.sys	klifsm.sys	klrsp.sys
klnsr.sys	klupd_klif_arkmon.sys	kmkuflt.sys	kmnwch.sys	kmxagent.sys
kmxfile.sys	kmxsbx.sys	ksfsflt.sys	ktfsfilter.sys	ktsyncfsflt.sys
kubwksp.sys	lafs.sys	lbd.sys	lbprotect.sys	lcgadmon.sys
lcgfile.sys	lcgfilemon.sys	lcmadmon.sys	lcmfile.sys	lcmfilemon.sys
lcmprintmon.sys	ldsecdrv.sys	libwamf.sys	livedrivefilter.sys	llfilter.sys

lmdriver.sys	lnvscenter.sys	locksmith.sys	lragentmf.sys	lrtp.sys
magicbackupmonitor.sys	magicprotect.sys	majoradvapi.sys	marspy.sys	maxcryptmon.sys
maxproc64.sys	maxprotector.sys	mbae64.sys	mbam.sys	mbamchameleon.
mbamshuriken.sys	mbamswissarmy.sys	mbamwatchdog.sys	mblmon.sys	mcfilemon32.sys
mcfilemon64.sys	mcstrg.sys	mearwfltdriver.sys	message.sys	mfdriver.sys
mfeaack.sys	mfeaskm.sys	mfeavfk.sys	mfeclnrk.sys	mfeelamk.sys
mfefirek.sys	mfehidk.sys	mfencbdc.sys	mfencfilter.sys	mfencoas.sys
mfencrk.sys	mfepik.sys	mfewfpk.sys	miniicpt.sys	minisp.sys
minitrc.sys	mlsaff.sys	mmpsy32.sys	mmpsy64.sys	monsterk.sys
mozycorpfilter.sys	mozyenterprisefilter.sys	mozyentfilter.sys	mozyhomefilter.sys	mozynextfilter.sys
mozyoemfilter.sys	mozyprofiler.sys	mpfilter.sys	mpkernel.sys	mpksldrv.sys
mpxmon.sys	mracdrv.sys	mrxpath.google.sys	mscan-rt.sys	msiodrv4.sys
msixpackagingtoolmonitor.sys	msnfsflt.sys	mspy.sys	mssecflt.sys	mtsvcdf.sys
mumdi.sys	mwac.sys	mwatcher.sys	mwfsmfltr.sys	mydlpmf.sys
namechanger.sys	nanoavmf.sys	naswsp.sys	ndgdmk.sys	neokerbyfilter
netaccctrl.sys	netaccctrl64.sys	netguard.sys	netpeeker.sys	ngscan.sys
nlcbhelpi64.sys	nlcbhelpx64.sys	nlcbhelpx86.sys	nlf.sys	nmlhssrv01.sys
nmpfilter.sys	nntinfo.sys	novashield.sys	nowonmf.sys	npetw.sys
nprosec.sys	npxgd.sys	npxgd64.sys	nrawvka.sys	nrcomgrdka.sys
nrcomgrdk.sys	nregsec.sys	nrpmonka.sys	nrpmonki.sys	nsminflt.sys
nsminflt64.sys	ntest.sys	ntfsf.sys	ntguard.sys	ntps_fa.sys
nullfilter.sys	nvcmlflt.sys	nvmmon.sys	nwedriver.sys	nxfmon.sys
nxrmflt.sys	oadevice.sys	oavfm.sys	oczminifilter.sys	odfsfilter.sys
odfsfimfilter.sys	odfstokenfilter.sys	offsm.sys	omfltlh.sys	osiris.sys
ospfile_mini.sys	ospmon.sys	parity.sys	passthrough.sys	path8flt.sys
pavdrv.sys	pcpid.sys	pctcore.sys	pctcore64.sys	pdgenfam.sys
pecfilter.sys	perfectworldanticheatsys.sys	pervac.sys	pfkrnl.sys	pfracdrv.sys
pgpfs.sys	pgpwdefs.sys	phantomd.sys	phdcbtldr.sys	pkgfilter.sys
pktcpt.sys	plgfltr.sys	plpoffdrv.sys	pointguardvista64f.sys	pointguardvistaf.s
pointguardvistar32.sys	pointguardvistar64.sys	procmon11.sys	proggerdriver.sys	psacfileaccessfilte
pscfff.sys	psgdflt.sys	psgfoctrl.sys	psinfile.sys	psinproc.sys
psisolator.sys	pwipf6.sys	pwprotect.sys	pzdrvxp.sys	qdocumentref.sys
qfapflt.sys	qfilter.sys	qfimdvr.sys	qfmon.sys	qminspec.sys
qmmon.sys	qqprotect.sys	qqprotectx64.sys	qqsysmon.sys	qqsysmonx64.sys
qutmdrv.sys	ranpodfs.sys	ransomdefensexxx.sys	ransomdetect.sys	reaqtor.sys
redlight.sys	regguard.sys	reghook.sys	regmonex.sys	repdrv.sys
repmon.sys	revefltmgr.sys	reveprocprotection.sys	revonetdriver.sys	rfllog.sys
rgnt.sys	rmdiskmon.sys	rmphvmonitor.sys	rpwatcher.sys	rrmon32.sys
rrmon64.sys	rsfdrv.sys	rsflt.sys	rspcrtw.sys	rsrtw.sys
rswctrl.sys	rswmon.sys	rtologon.sys	rtw.sys	ruaff.sys

rubrikfileaudit.sys	ruidiskfs.sys	ruieye.sys	ruifileaccess.sys	ruimachine.sys
ruiminispy.sys	rvsavd.sys	rvsmon.sys	rw7fsflt.sys	rwchangedrv.sys
ryfilter.sys	ryguard.sys	safe-agent.sys	safsfilter.sys	sagntflt.sys
sahara.sys	sakfile.sys	sakmfile.sys	samflt.sys	samsungrapidsflti
sandriver.sys	santa.sys	sascan.sys	savant.sys	savonaccess.sys
scaegis.sys	scauthfsflt.sys	scauthiodrv.sys	scensemmon.sys	scfltr.sys
scifsflt.sys	scriptflt.sys	sconnect.sys	scred.sys	sdactmon.sys
sddrvldr.sys	sdvfilter.sys	se46filter.sys	secddodriver.sys	secone_filemon10.sys
secone_proc10.sys	secone_reg10.sys	secone_usb.sys	secrmm.sys	secufile.sys
secure_os.sys	secure_os_mf.sys	securofsd_x64.sys	sefo.sys	segf.sys
segiraflt.sys	segmd.sys	segmp.sys	sentinelmonitor.sys	serdr.sys
serfs.sys	sfac.sys	sfavflt.sys	sfdfilter.sys	sfpmonitor.sys
sgresflt.sys	shdlpmedia.sys	shdlpsf.sys	sheedantivirusfilterdriver.sys	sheedselfprotectic.sys
shldflt.sys	si32_file.sys	si64_file.sys	sieflt.sys	simrep.sys
sisipsfilefilter	sk.sys	skyamdrv.sys	skyrgdrv.sys	skywpdrv.sys
slb_guard.sys	sld.sys	smbresilfilter.sys	smdrvnt.sys	sndacs.sys
snexequota.sys	snilog.sys	snimg.sys	snscore.sys	snsrlt.sys
sodatpfl.sys	softfilterxxx.sys	soidriver.sys	solitkm.sys	sonar.sys
sophosdt2.sys	sophosed.sys	sophosnplwf.sys	sophossupport.sys	spbbcdrv.sys
spellmon.sys	spider3g.sys	spiderg3.sys	spiminifilter.sys	spotlight.sys
sprtdrv.sys	sqlsafefilterdriver.sys	srminifilterdrv.sys	srtsp.sys	srtsp64.sys
srtspit.sys	ssfmonm.sys	ssrfsf.sys	ssvhook.sys	stcvsm.sys
stegoprotect.sys	stest.sys	stflt.sys	stkrnl64.sys	storagedrv.sys
strapvista.sys	strapvista64.sys	svcbt.sys	swcommfltr.sys	swfsfltr.sys
swfsfltrv2.sys	swin.sys	symafr.sys	symefa.sys	symefa64.sys
symefasi.sys	symevent.sys	symevent64x86.sys	symevnt.sys	symevnt32.sys
symhsm.sys	symrg.sys	sysdiag.sys	sysmon.sys	sysmondrv.sys
sysplant.sys	szardrv.sys	szdfmdrv.sys	szdfmdrv_usb.sys	szedrv.sys
szpcmdrv.sys	taniumrecorderdrv.sys	taobserveflt.sys	tbffilt.sys	tbnminifilter.sys
tbrdrv.sys	tdevflt.sys	teddrv.sys	tenrsafe2.sys	tesmon.sys
tesxnginx.sys	tesxporter.sys	tffregnt.sys	tfssflt.sys	tgfsmf.sys
thetta.sys	thfilter.sys	threatstackfim.sys	tkdac2k.sys	tkdacxp.sys
tkdacxp64.sys	tkfsavxp.sys	tkfsavxp64.sys	tkfsft.sys	tkfsft64.sys
tkpcftcb.sys	tkpcftcb64.sys	tkpl2k.sys	tkpl2k64.sys	tksp2k.sys
tkspxp.sys	tkspxp64.sys	tmactmon.sys	tmcomm.sys	tmesflt.sys
tmevtmgr.sys	tmeyes.sys	tmfsdrv2.sys	tmkmsnsr.sys	tmnciesc.sys
tmpreflt.sys	tmumh.sys	tmums.sys	tmusa.sys	tmxpathl.sys
topdogfsfilt.sys	trace.sys	trfsfilter.sys	tritiumfltr.sys	trpmnflt.sys
trufos.sys	trustededgeffd.sys	tsifilemon.sys	tss.sys	tstfilter.sys
tstfsredir.sys	tstregredir.sys	tsyscare.sys	tvdriver.sys	tvfiltr.sys

tvmfltr.sys	tvptfile.sys	tvspfltr.sys	twbdcfilter.sys	txfilefilter.sys
txregmon.sys	uamfltr.sys	ucafltdriver.sys	ufdfilter.sys	uncheater.sys
upguardrealtime.sys	usbl_ifsfltr.sys	usbpdh.sys	usbtest.sys	uvmcifsf.sys
uwfreq.sys	uwfs.sys	v3flt2k.sys	v3flu2k.sys	v3ift2k.sys
v3iftmnt.sys	v3mifint.sys	varpfmon.sys	vast.sys	vcdriv.sys
vchle.sys	vcmfilter.sys	vcreg.sys	veeamfct.sys	vfdrv.sys
vfilefilter.sys	vfpd.sys	vfsenc.sys	vhddelta.sys	vhdtrack.sys
vidderfs.sys	vintmfs.sys	virtfile.sys	virtualagent.sys	vk_fsf.sys
vlfltr.sys	vmwvvpfsd.sys	vollock.sys	vpdrvnt.sys	vradfil2.sys
vraptdef.sys	vraptfltr.sys	vrarnfltr.sys	vrbbdflt.sys	vrexpdrv.sys
vrfstfm.sys	vrfstmx.sys	vrnsfilter.sys	vrsdam.sys	vrsdcore.sys
vrsdetri.sys	vrsdetrix.sys	vr sdfmx.sys	vrvbrfsfilter.sys	vsepflt.sys
vsscanner.sys	vtsysfltr.sys	vxf srep.sys	wats_se.sys	wbfilter.sys
wcsdriver.sys	wdcfilter.sys	wdfilter.sys	wdocsafe.sys	wfp_mrt.sys
wgfile.sys	whiteshield.sys	windbdrv.sys	windd.sys	winfladrv.sys
winflahdrv.sys	winfldrv.sys	winfpdrv.sys	winload.sys	winteonminifilter.s
wiper.sys	wlminisecmod.sys	wntgpdrv.sys	wraekernel.sys	wrcore.sys
wrcore.x64.sys	wrdwizfileprot.sys	wrdwizregprot.sys	wrdwizscanner.sys	wrdwizsecure64.s
wrkrn.sys	wrpfv.sys	wsafefilter.sys	wscm.sys	xcpl.sys
xendorflit.sys	xfsgk.sys	xhunter1.sys	xhunter64.sys	xiaobaifs.sys
xiaobaifsr.sys	xkfsfd.sys	xoiv8x64.sys	xomfcbt8x64.sys	yahoostorage.sys
yfsd.sys	yfsd2.sys	yfsdr.sys	yfsrd.sys	zampit_ml.sys
zesfsmf.sys	zqfilter.sys	zsfprt.sys	zwasatom.sys	zwpxesvr.sys
zxfsfilt.sys	zyfm.sys	zzpensys.sys		

Further reading

For the latest security research from the Microsoft Threat Intelligence community, check out the Microsoft Threat Intelligence Blog: <https://aka.ms/threatintelblog>.

To get notified about new publications and to join discussions on social media, follow us on Twitter at <https://twitter.com/MsftSecIntel>.


Related Posts





Guidance for investigating attacks using CVE-2022-21894: The BlackLotus campaign

This guide provides steps that organizations can take to assess whether users have been targeted or compromised by threat actors exploiting CVE-2022-21894 via a Unified Extensible Firmware Interface (UEFI) bootkit called BlackLotus.

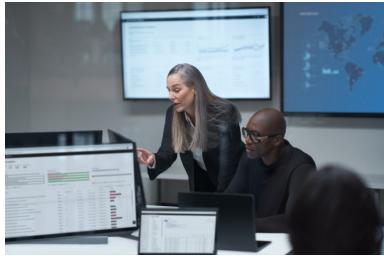

Why you should practice rollbacks to prevent data loss in a ransomware attack

Tanya Janca, Founder and Chief Executive Officer of We Hack Purple, shares insights on application security and offers strategies to protect against data loss from ransomware attacks.